

Ceiling

- 1 Specifications
- 2 Capacity Table
- 3 Dimensional Drawing
- 4 Electrical Wiring Diagram
- 5 Sound Pressure Level
- 6 Temperature and air flow distribution

1 Specifications

Ceiling

1) Technical specifications

Model			AM056FNCDEH***	AM071FNCDEH***	
Power Supply		Ø, #, V, Hz	1, 2, 220~240, 50	1, 2, 220~240, 50	
Mode ^{*)1)}		-	HP/HR	HP/HR	
Performance	Capacity (Nominal)	Cooling ^{*)2)}	kW	5.6	
		Btu/h	19,100	24,200	
	Heating ^{*)3)}	kW	6.3	8.0	
		Btu/h	21,500	27,300	
Power	Power Input (Nominal)	Cooling ^{*)2)}	W	72	
		Heating ^{*)3)}		72	
	Current Input (Nominal)	Cooling ^{*)2)}	A	0.33	
		Heating ^{*)3)}		0.28	
Fan	Motor	Type	-	Sirocco Fan	
		Output	W	60	
		Number of unit	EA	1	
	Air Flow Rate	H/M/L (UL)	CMM	14.00/13.00/12.00	
			l/s	233.33/216.67/200.00	
	External Pressure	Min / Std / Max	mmAq	-	
			Pa	-	
			WG	-	
Option Code			-	013054-105000-203838-330010	
Piping Connections	Liquid Pipe		Ø, mm	6.35	
			Ø, inch	1/4	
	Gas Pipe		Ø, mm	12.70	
			Ø, inch	1/2	
	Drain Pipe		Ø, mm	ID 18 HOSE	
Field Wiring	Power Source Wire	Below 20m / over 20m	mm ²	1.5 / 2.5	
	Transmission Cable		mm ²	0.75~1.5	
Refrigerant	Type		-	R410A	
	Control Method		-	EEV NOT INCLUDED	
Sound	Sound Pressure	High / Mid / Low ^{*)4)}	dBA	40 / 37 / 34	
Dimensions	Net Weight		kg	21.00	
	Shipping Weight		kg	25.50	
	Net Dimensions (WxHxD)		mm	1000 x 650 x 200	
	Shipping Dimensions (WxHxD)		mm	1080 x 730 x 300	
Panel Size	Panel model		-	-	
	Panel Net Weight		kg	-	
	Shipping Weight		kg	-	
	Net Dimensions (WxHxD)		mm	-	
	Shipping Dimensions (WxHxD)		mm	-	
Additional Accessories	Drain pump	Drain pump	- / Model	-	
		Max. lifting Height / Displacement	mm/liter/h	-	
	Air Filter	-	-	Long life filter	
* Specifications may be subject to change without prior notice for product improvement.					
*1) Mode - HP : Heat Pump, HR : Heat Recovery					
*2) Nominal cooling capacities are based on; - Indoor temperature : 27°C DB, 19°C WB - Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m					
*3) Nominal heating capacities are based on; - Indoor temperature : 20°C DB, 15°C WB - Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m					
*4) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.					
*5) These products contain R410A which is fluorinated greenhouse gas.					
* Heat Exchanger type : Fin & Tube (Fin : Al, Tube : Cu)					

2 Capacity table

Ceiling

1) Cooling

Model	Outdoor temperature (°C, DB)	Indoor temperature (°C, WB)													
		20 (°C, DB)		23 (°C, DB)		26 (°C, DB)		27 (°C, DB)		28 (°C, DB)		30 (°C, DB)		32 (°C, DB)	
		14 (°C, WB)		16 (°C, WB)		18 (°C, WB)		19 (°C, WB)		20 (°C, WB)		22 (°C, WB)		24 (°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
056	10	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.3	3.8	6.7	3.7
	12	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.3	3.8	6.7	3.7
	14	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.7
	16	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	18	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	20	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	21	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	23	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	25	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	27	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	29	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	31	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	33	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	35	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.6
	37	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.1	3.7	6.5	3.5
	39	3.9	3.2	4.6	3.5	5.3	3.7	5.6	3.8	5.8	3.8	6.1	3.7	6.4	3.4
071	10	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	8.0	4.9	8.5	4.7
	12	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.5	4.7
	14	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.5	4.7
	16	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	18	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	20	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	21	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	23	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	25	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	27	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	29	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	31	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	33	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	35	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.9	4.8	8.4	4.6
	37	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.4	4.9	7.8	4.7	8.2	4.5
	39	4.9	4.0	5.8	4.4	6.7	4.8	7.1	4.9	7.3	4.8	7.7	4.6	8.1	4.4


2) Heating

Model	Outdoor temperature (°C)	Indoor temperature (°C, DB)						TC : Total Capacity(kW)	
		16.0		18.0		20.0		22.0	
		TC	TC	TC	TC	TC	TC	TC	TC
DB	WB	kW	kW	kW	kW	kW	kW	kW	kW
056	-20	-21	3.9	3.8	3.8	3.7	3.7	3.7	3.7
	-17	-18	4.0	4.0	3.9	3.8	3.8	3.8	3.8
	-15	-16	4.2	4.1	4.0	3.9	3.9	3.8	3.8
	-12	-13	4.4	4.3	4.2	4.2	4.2	4.1	4.1
	-10	-11	4.6	4.6	4.5	4.4	4.4	4.4	4.4
	-7	-8	4.9	4.8	4.8	4.7	4.7	4.5	4.5
	-5	-6	5.2	5.1	5.0	4.9	4.9	4.7	4.7
	-3	-4	5.4	5.3	5.3	5.1	5.1	4.9	4.9
	0	-1	5.7	5.6	5.5	5.5	5.3	5.0	5.0
	3	2.2	5.9	5.9	5.8	5.6	5.6	5.3	5.3
	5	4.1	6.2	6.1	6.0	5.7	5.7	5.3	5.3
	7	6	6.5	6.4	6.3	5.8	5.8	5.3	5.3
	9	7.9	6.7	6.5	6.3	5.8	5.8	5.3	5.3
	11	9.8	6.9	6.6	6.3	5.8	5.8	5.3	5.3
	13	12	7.1	6.7	6.3	5.8	5.8	5.3	5.3
	15	14	7.3	6.8	6.3	5.8	5.8	5.3	5.3
071	-20	-21	4.9	4.9	4.8	4.7	4.7	4.7	4.7
	-17	-18	5.1	5.0	4.9	4.8	4.8	4.8	4.8
	-15	-16	5.3	5.2	5.1	4.9	4.9	4.8	4.8
	-12	-13	5.6	5.5	5.4	5.3	5.3	5.2	5.2
	-10	-11	5.9	5.8	5.7	5.6	5.6	5.6	5.6
	-7	-8	6.2	6.1	6.0	5.9	5.9	5.8	5.8
	-5	-6	6.5	6.5	6.4	6.2	6.2	6.0	6.0
	-3	-4	6.9	6.8	6.7	6.4	6.4	6.2	6.2
	0	-1	7.2	7.1	7.0	6.7	6.7	6.4	6.4
	3	2.2	7.6	7.5	7.3	7.1	7.1	6.8	6.8
	5	4.1	7.9	7.8	7.7	7.2	7.2	6.8	6.8
	7	6	8.2	8.1	8.0	7.4	7.4	6.8	6.8
	9	7.9	8.5	8.2	8.0	7.4	7.4	6.8	6.8
	11	9.8	8.7	8.4	8.0	7.4	7.4	6.8	6.8
	13	12	9.0	8.5	8.0	7.4	7.4	6.8	6.8
	15	14	9.2	8.6	8.0	7.4	7.4	6.8	6.8

3 Dimensional drawing

Ceiling

Unit:mm

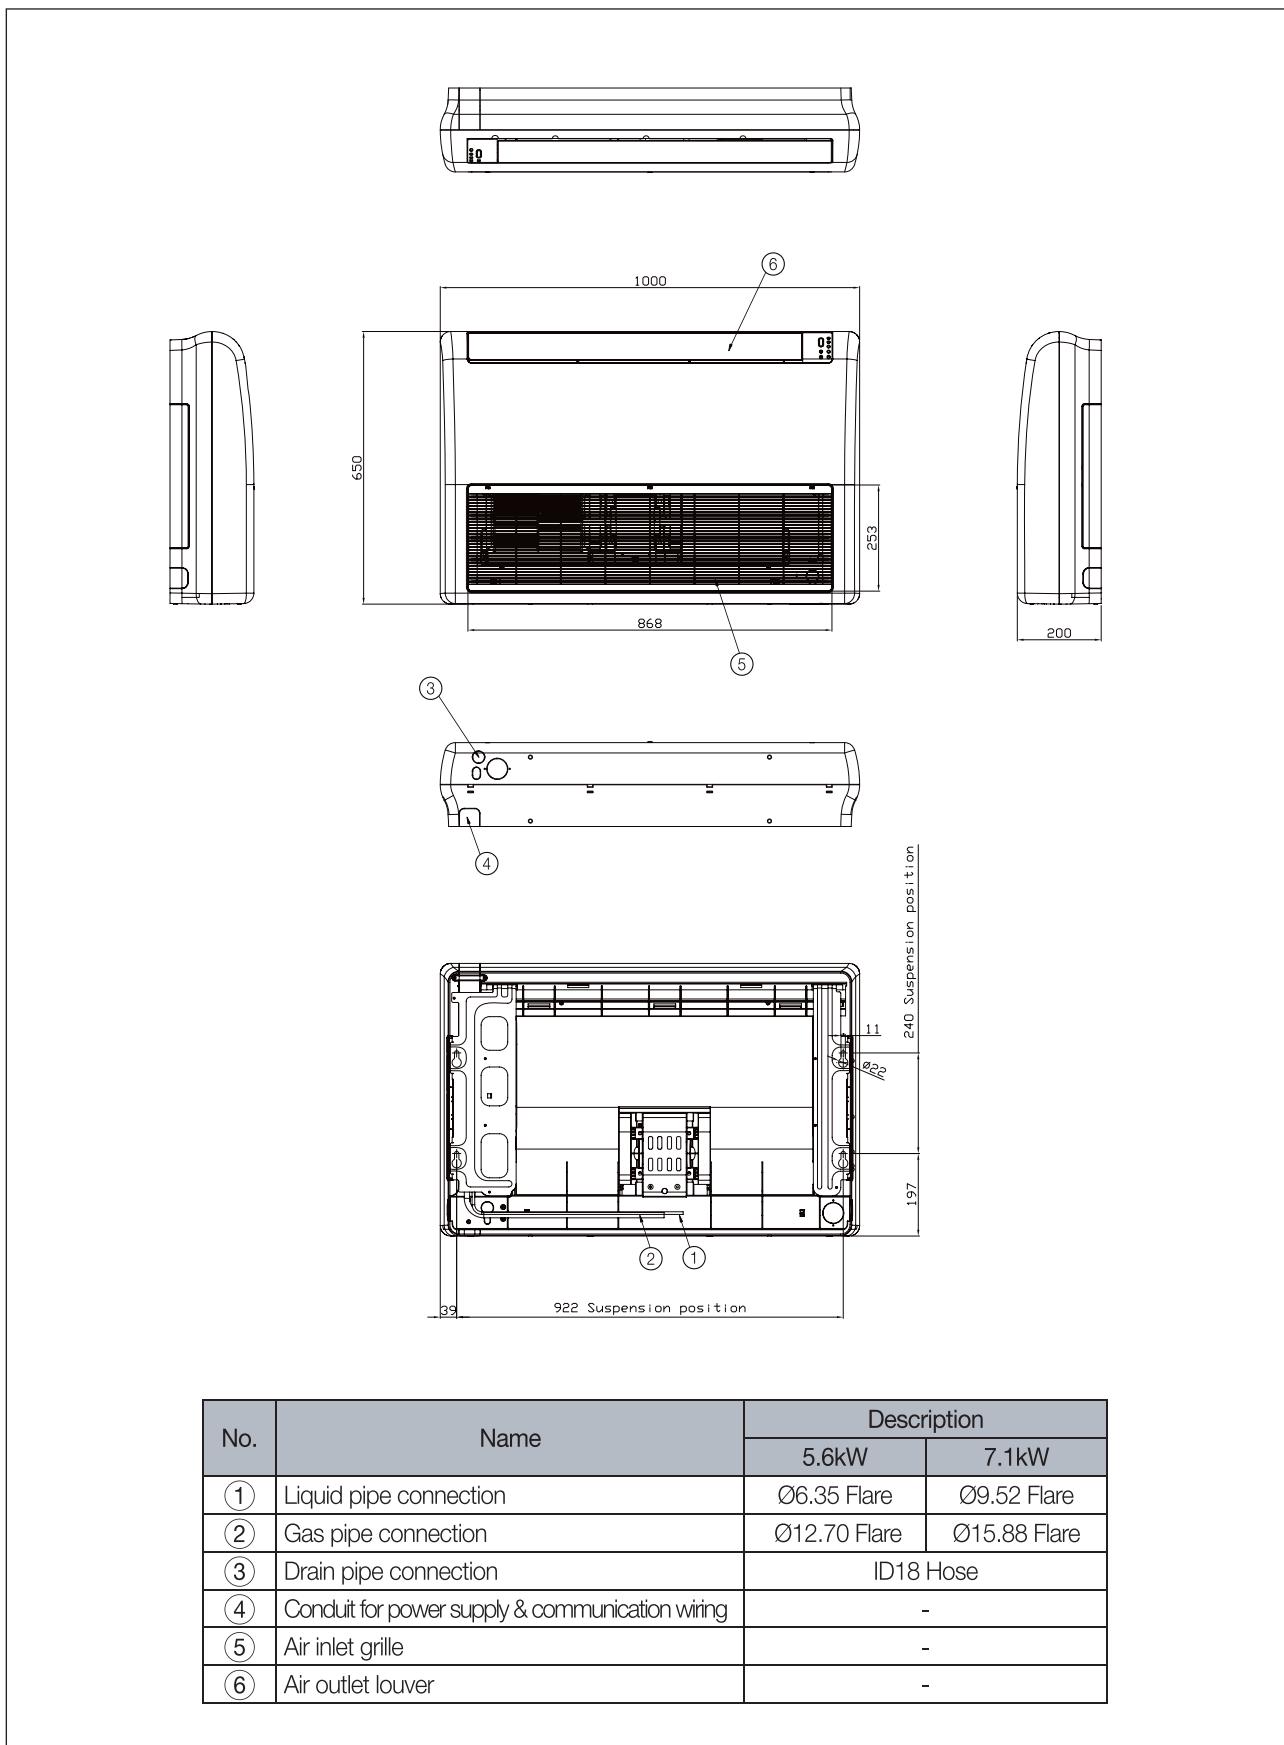


No.	Name	Description	
		5.6kW	7.1kW
(1)	Liquid pipe connection	Ø6.35 Flare	Ø9.52 Flare
(2)	Gas pipe connection	Ø12.70 Flare	Ø15.88 Flare
(3)	Drain pipe connection	ID18 Hose	
(4)	Conduit for power supply & communication wiring	-	
(5)	Air inlet grille	-	
(6)	Air outlet louver	-	

4 Electrical Wiring Diagram

Ceiling

AM056/071FNCDEH/EU

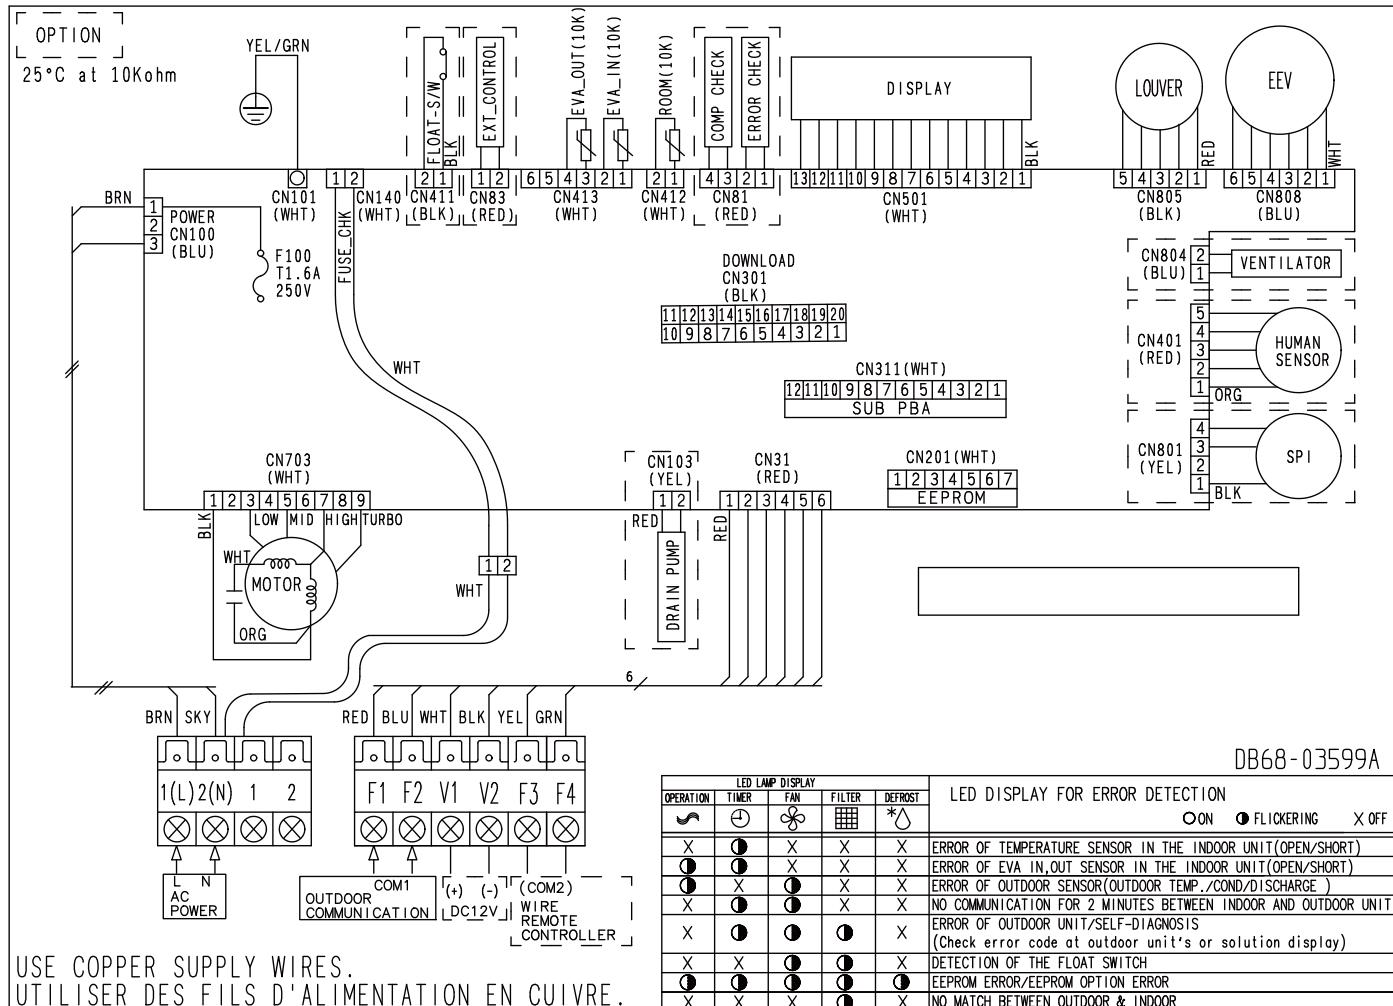


NOTE

- This wiring diagram applies only to the indoor unit.
- Symbols show as follow:
BLK : black, RED : red, BLU : blue, WHT:white, YEL : yellow, BRN : brown, SKY : sky-blue, GRN : green
- For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remotecontroller transmission F3-F4.
- : Protective earth(screw), : Connector, n : The wire quantity

5 Sound pressure level

Ceiling

1) Operation sound level

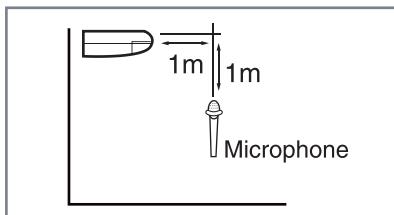

Model	High	Low
AM056FNCDEH***	40	34
AM071FNCDEH***	44	40

Unit : dB(A)

Note

Specifications may be subject to change without prior notice.

Sound pressure level is obtained in an anechoic room.

Sound pressure level is a relative value, depending on the distance and acoustic environment.


Sound pressure level may differ depending on operation condition.

dBA = A-weighted sound pressure level


Reference acoustic pressure 0 dB= 20 uPa

2) NC curves

(1) AM056FNCDEH***

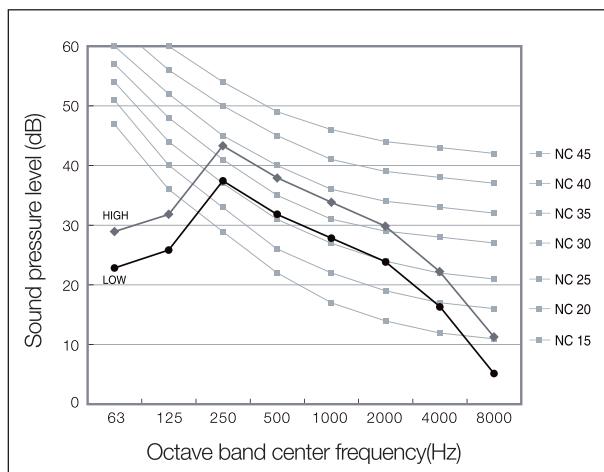

(2) AM071FNCDEH***

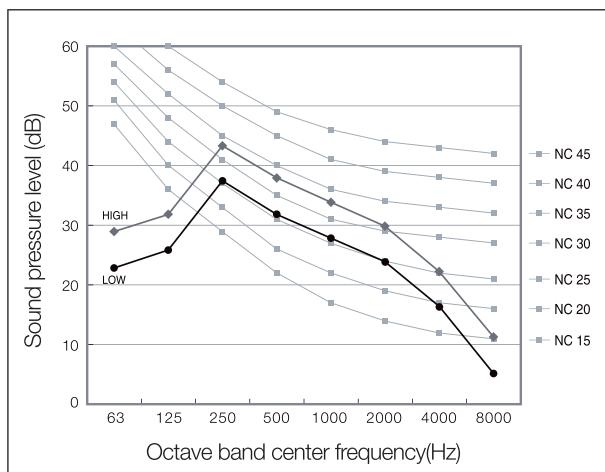


6 Temperature and air flow distribution

Ceiling

AM071FNCDEH/EU (Floor installation)


(1) Cooling air velocity distribution

Discharge angle : 36°

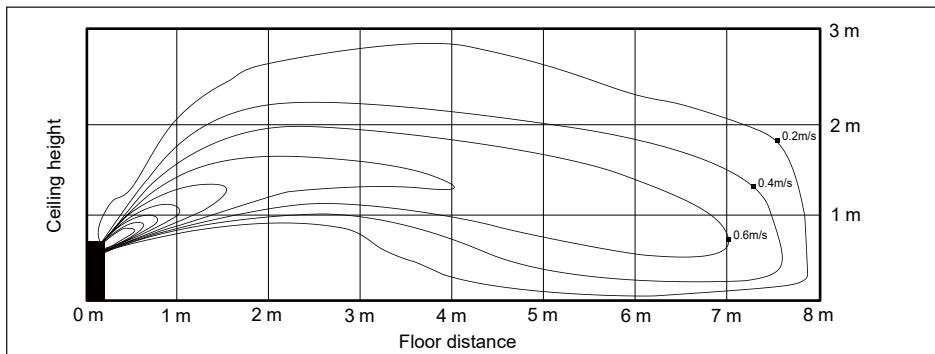


(2) Cooling temperature distribution

Discharge angle : 36°

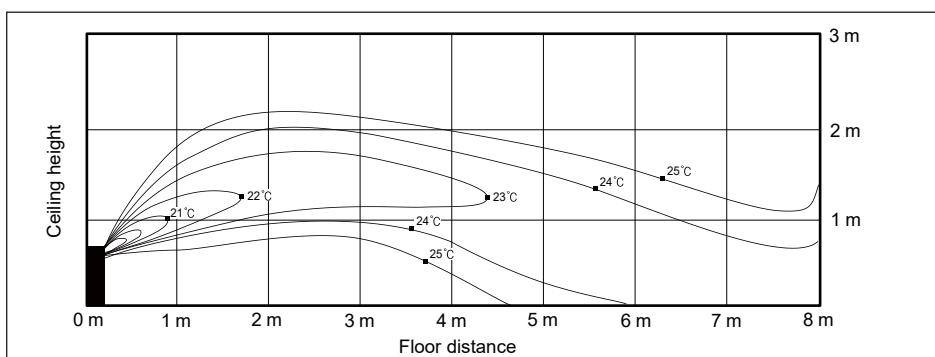


(3) Heating air velocity distribution

Discharge angle : 54°

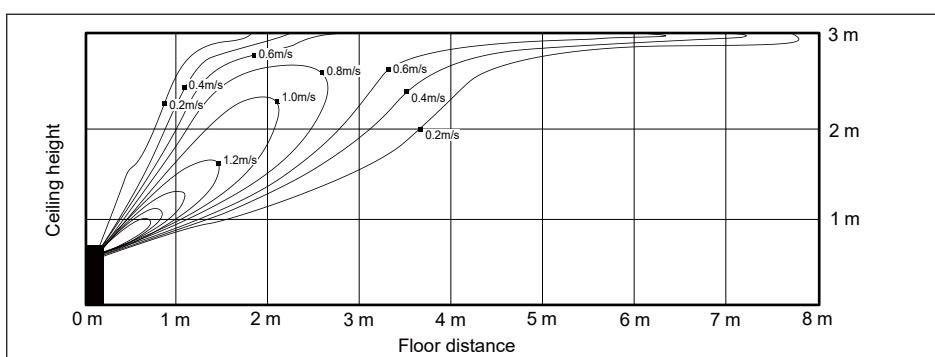

(4) Heating temperature distribution

Discharge angle : 54°

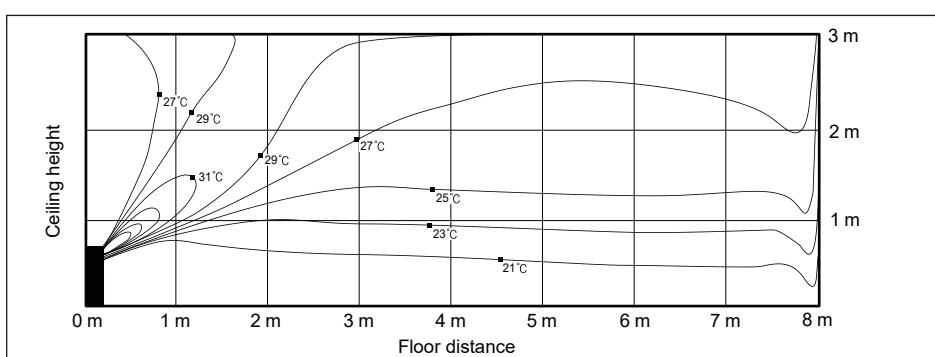


6 Temperature and air flow distribution

Ceiling

AM071FNCDEH/EU (Ceiling installation)


(1) Cooling air velocity distribution

Discharge angle : 36°

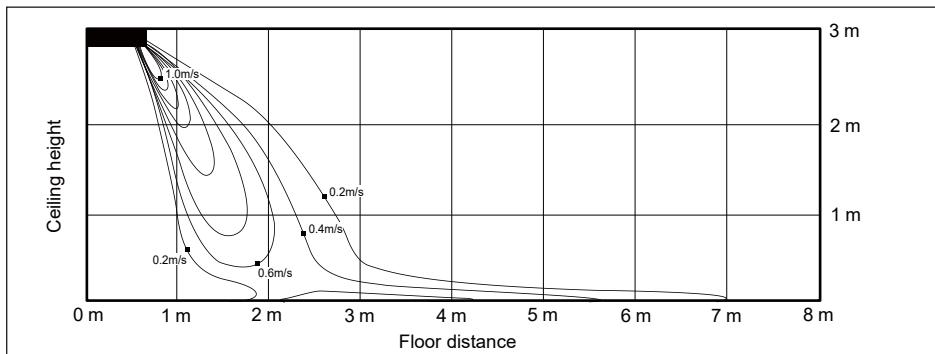


(2) Cooling temperature distribution

Discharge angle : 36°

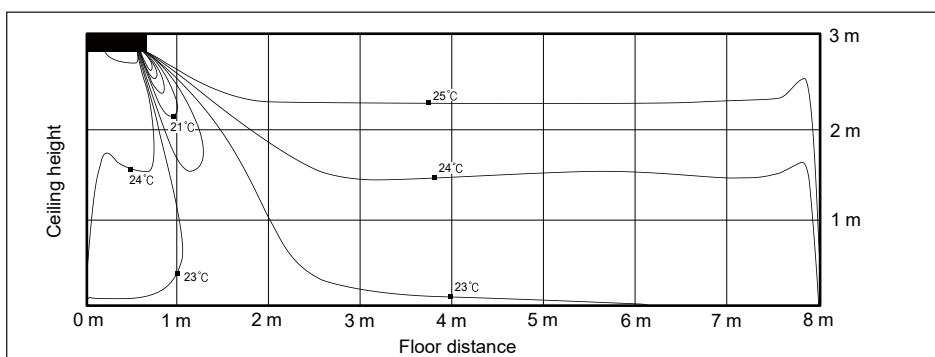

(3) Heating air velocity distribution

Discharge angle : 54°

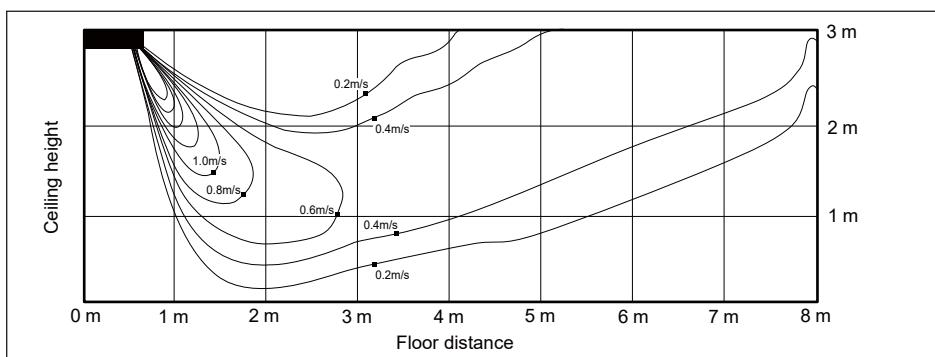

(4) Heating temperature distribution

Discharge angle : 54°

