PAC

1 Specifications

2 Capacity Table

3 Dimensional Drawing

4 Electrical Wiring Diagram

5 Sound Pressure Level

1 Specifications

PAC

Type				PAC	PAC
Model				AM140JNPDKH/TK	AM280JNPDKH/TK
Power Supply			Ø, #, V, Hz	1,2,220-240,50/60	1,2,220-240,50
Mode			-	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling	kW	14.00	28.00
			Btu/h	47,800	95,500
		Heating	kW	16.00	31.50
			Btu/h	54,600	107,500
Power	Power Input (Nominal)	Cooling	W	190.00	955.00
		Heating		190.00	955.00
	Current Input (Nominal)	Cooling	A	0.90	4.73
		Heating		0.90	4.73
Fan	Motor	Type	-	Sirocco Fan	Sirocco Fan
		Output x n	w	154 x 1	700 x 1
	Air Flow Rate	H/M/L (UL)	CMM	35.00 / 30.50 / 27.50	70.00 / 60.00 / 50.00
			l/s	583.33 / 508.33 / 458.33	1,166.67 / 1,000.00 / 833.33
	External Pressure	Min/Std/Max	mmAq	-	-
			Pa	-	-
Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52
			Ø, inch	3/8"	3/8"
	Gas Pipe		Ø, mm	15.88	22.22
			Ø, inch	5/8"	7/8"
	Drain Pipe		Ø, mm	ID18 HOSE	VP25 (OD 32, ID 25)
Field Wiring	Power Source Wire		mm²	2.5	2.5
	Transmission Cable		mm²	VCTF 0.75 - 1.50	VCTF 0.75 - 1.50
Refrigerant	Type		-	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED
Sound	Pressure	High / Low	dB(A)	54 / 47	58 / 54
	Power	Cooling		-	-
Dimension	Net Weight		kg	48.00	115.00
	Shipping Weight		kg	55.00	130.00
	Net Dimensions (WxHxD)		mm	650 x 1,850 x 400	1,100 x 1,800 x 485
	Shipping Dimensions (WxHxD)		mm	705 x 1,963 x 493	1,177 x 1,950 x 563
Panel Size	Panel model		-	-	-
	Panel Net Weight		kg	-	-
	Shipping Weight		kg	-	-
	Net Dimensions (WxHxD)		mm	-	-
	Shipping Dimensions (WxHxD)		mm	-	-
Additional Accessories	Drain Pump	Drain Pump	- / Model	-	-
		Max. lifting Height / Displacement	mm/liter/h	-	-
	Air Filter		-	-	-

NOTE

1) Mode : HP(Heat Pump), HR(Heat Recovery)
2) Nominal Cooling : Indoor temperature 27ºCDB / 19ºCWB, Outdoor temperature 35ºCDB/24ºCWB, Refrigerant pipe length 7.5m, Level difference 0m.
3) Nominal Heating : Indoor temperature 20ºCDB / 15ºCWB, Outdoor temperature 7ºCDB / 6ºCWB, Refrigerant pipe length 7.5m, Level difference 0m.
4) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
5) These products contain R410A which is fluorinated greenhouse gas.
6) Specifications may be subject to change without prior notice.
7) In case of AM280JNPDKH/TK, it operates with only 50Hz power supply.

* Heat Exchanger type : Fin & Tube (Fin : Al, Tube : Cu)

2 Capacity Table

PAC

Cooling

TC : Total Capacity(kW), SHC : Sensible Heat Capacity(kW)

Capacity Index	Outdoor Air Temp. (℃,DB)	Indoor temperature													
		20(℃,DB)		23(℃,DB)		26(℃,DB)		27(℃,DB)		28(℃,DB)		30(℃,DB)		32(℃,DB)	
		14(℃,WB)		16(℃,WB)		18(℃,WB)		19(℃,WB)		20(℃,WB)		22(℃,WB)		24(℃,WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
140	10	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.6	10.9	15.7	11.0	16.8	10.9
	12	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	14	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	16	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.6	10.7
	18	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.6	10.7
	20	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	21	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	23	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	25	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	27	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	29	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	31	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	33	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	35	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	37	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.4	10.7	16.3	10.5
	39	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.4	10.7	15.1	10.5	15.9	10.3
	42	9.7	8.6	11.4	9.7	13.0	10.4	13.8	10.7	14.2	10.6	14.8	10.3	15.5	10.0
	44	9.7	8.6	11.4	9.7	12.7	10.1	13.4	10.3	13.8	10.3	14.2	9.9	15.0	9.7
	46	9.7	8.6	11.3	9.6	12.4	10.0	12.9	10.0	13.4	10.0	13.8	9.6	14.6	9.4
	48	9.6	8.5	11.1	9.5	12.2	9.8	12.6	9.7	13.1	9.8	13.4	9.3	14.1	9.1
280	10	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.6	32.7	23.0	34.7	23.2
	12	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.4
	14	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.0
	16	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.1	34.7	23.3
	18	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.7	23.1
	20	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.3	23.0
	21	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	34.3	22.9
	23	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.2	33.7	22.6
	25	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	27	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	29	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.0	33.7	22.8
	31	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.2	33.7	22.8
	33	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.8	32.7	23.5	33.7	22.8
	35	19.7	17.6	23.3	19.6	26.5	21.2	28.0	21.8	29.9	22.6	32.7	23.5	33.7	23.0
	37	19.4	17.3	23.0	19.3	26.3	20.9	28.0	21.8	29.7	22.7	32.2	23.1	33.2	22.5
	39	19.2	17.1	22.7	19.1	26.3	20.9	27.9	21.6	29.5	22.5	31.8	23.4	32.8	22.4
	42	19.2	17.1	22.7	19.1	26.1	20.7	27.5	21.3	29.2	22.2	31.2	23.0	32.0	21.8
	44	19.2	17.1	22.7	19.1	25.4	20.2	26.6	20.6	28.3	21.6	30.0	22.1	30.9	21.1
	46	19.2	17.1	22.5	18.9	25.0	19.9	25.8	20.0	27.5	21.0	29.0	21.4	30.0	20.5
	48	19.0	16.9	22.2	18.7	24.6	19.5	25.1	19.4	26.9	20.5	28.2	20.8	29.0	19.8

2 Capacity Table

PAC

Heating

TC : Total Capacity(kW)

Capacity Index	Outdoor Air Temp. (℃)		Indoor temperature (℃,DB)				
			16(℃,DB)	18(℃,DB)	20(℃,DB)	22(℃,DB)	24(℃,DB)
			TC	TC	TC	TC	TC
	DB	WB	kW	kW	kW	kW	kW
140	-19.8	-20.0	9.5	9.5	9.4	9.4	9.3
	-18.8	-19.0	9.7	9.7	9.5	9.5	9.3
	-16.7	-17.0	10.2	10.0	9.7	9.6	9.4
	-14.7	-15.0	10.8	10.5	10.2	9.9	9.6
	-12.6	-13.0	11.1	10.9	10.7	10.4	10.1
	-10.5	-11.0	11.6	11.5	11.3	11.1	10.9
	-9.5	-10.0	11.8	11.7	11.5	11.4	11.2
	-8.5	-9.1	12.1	11.9	11.8	11.6	11.3
	-7.0	-7.6	12.4	12.2	12.1	11.8	11.5
	-5.0	-5.6	13.1	12.9	12.7	12.3	12.0
	-3.0	-3.7	13.8	13.6	13.4	12.9	12.4
	0.0	-0.7	14.4	14.2	14.0	13.4	12.8
	3.0	2.2	15.1	14.9	14.7	14.1	13.5
	5.0	4.1	15.8	15.6	15.3	14.4	13.5
	7.0	6.0	16.5	16.2	16.0	14.8	13.5
	9.0	7.9	17.0	16.5	16.0	14.8	13.5
	11.0	9.8	17.5	16.7	16.0	14.8	13.5
	13.0	11.8	18.0	17.0	16.0	14.8	13.5
	15.0	13.7	18.5	17.2	16.0	14.8	13.5
280	-19.8	-20.0	25.4	24.4	23.0	22.0	21.1
	-18.8	-19.0	25.6	24.6	23.2	22.3	21.6
	-16.7	-17.0	26.2	25.1	23.7	23.0	22.6
	-14.7	-15.0	27.2	26.1	24.7	23.9	23.5
	-12.6	-13.0	28.4	27.3	25.8	24.9	24.5
	-10.5	-11.0	30.4	29.2	27.5	26.4	26.0
	-9.5	-10.0	31.1	29.8	28.1	27.0	26.6
	-8.5	-9.1	31.4	30.1	28.4	27.4	26.9
	-7.0	-7.6	31.8	30.5	28.8	27.9	27.3
	-5.0	-5.6	32.7	31.5	29.7	29.0	28.1
	-3.0	-3.7	33.5	32.2	30.4	29.8	28.7
	0.0	-0.7	34.3	33.1	31.1	30.4	29.3
	3.0	2.2	35.0	33.7	31.5	30.4	29.5
	5.0	4.1	35.3	33.7	31.5	30.4	29.5
	7.0	6.0	35.7	33.7	31.5	30.4	29.5
	9.0	7.9	35.7	33.7	31.5	30.4	29.5
	11.0	9.8	35.7	33.7	31.5	30.4	29.5
	13.0	11.8	35.7	33.7	31.5	30.4	29.5
	15.0	13.7	35.7	33.7	31.5	30.4	29.5

3 Dimensional Drawing

PAC

AM140JNPDKH/TK

[Unit : mm]

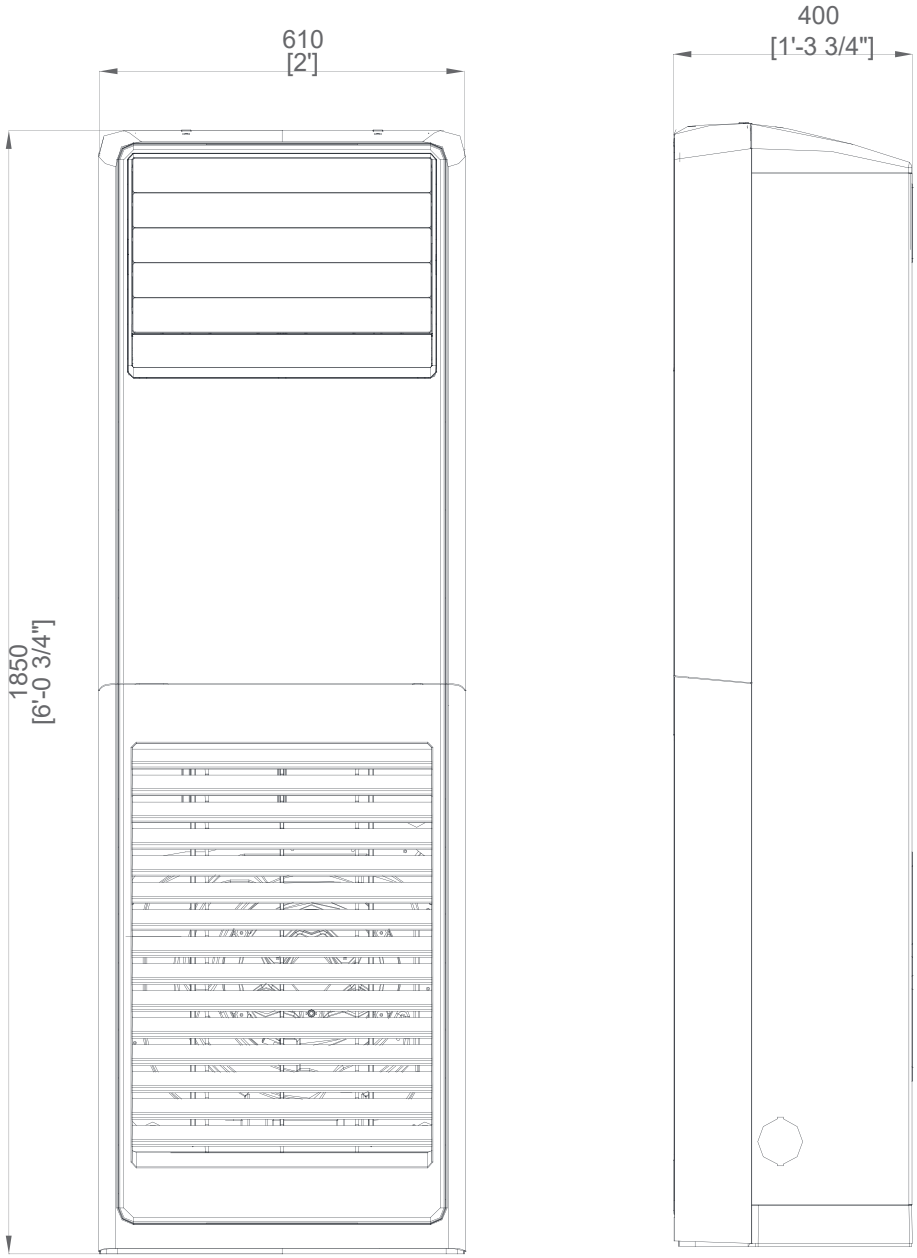

No.	Name	Description
1	Refrigerant gas pipe	Ø15.88 Flare
2	Refrigerant liquid pipe	Ø9.52 Flare
3	Drain pipe connection	-

3 Dimensional Drawing

PAC

AM280JNPDKH/TK

[Unit : mm]

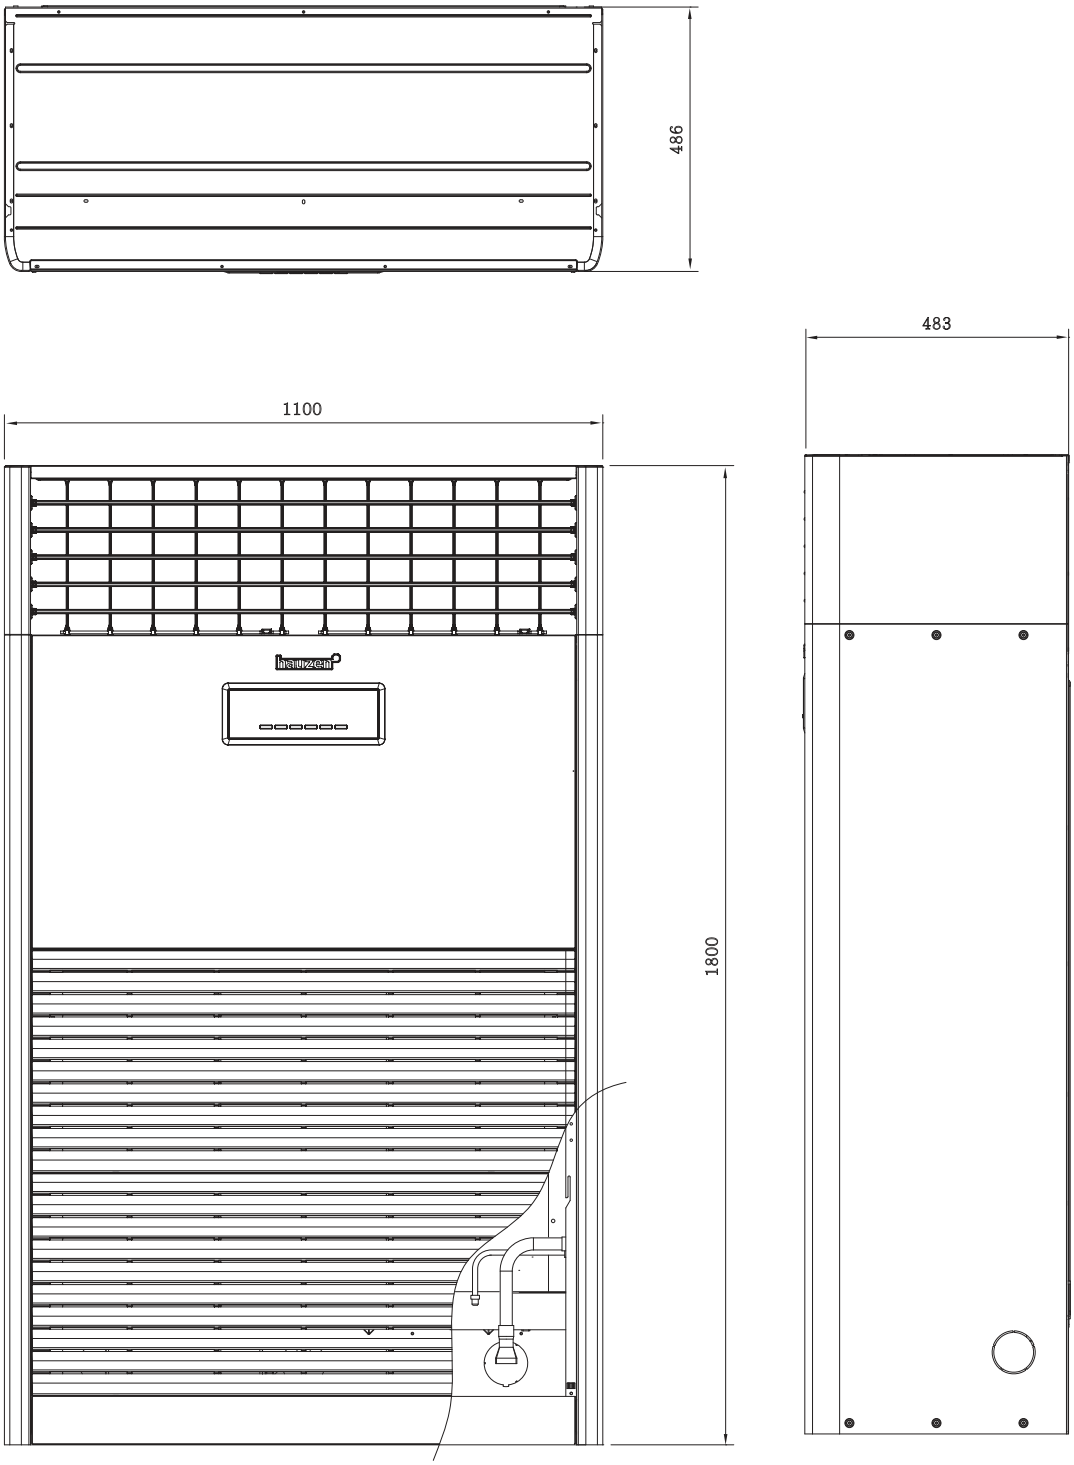

Name	Description
Refrigerant gas pipe	Φ22.22 Flare
Refrigerant liquid pipe	Φ9.52 Flare
Drain pipe connection	VP25 (OD 32, ID 25)

4 Electrical Wiring Diagram

PAC

AM140JNPDKH/TK

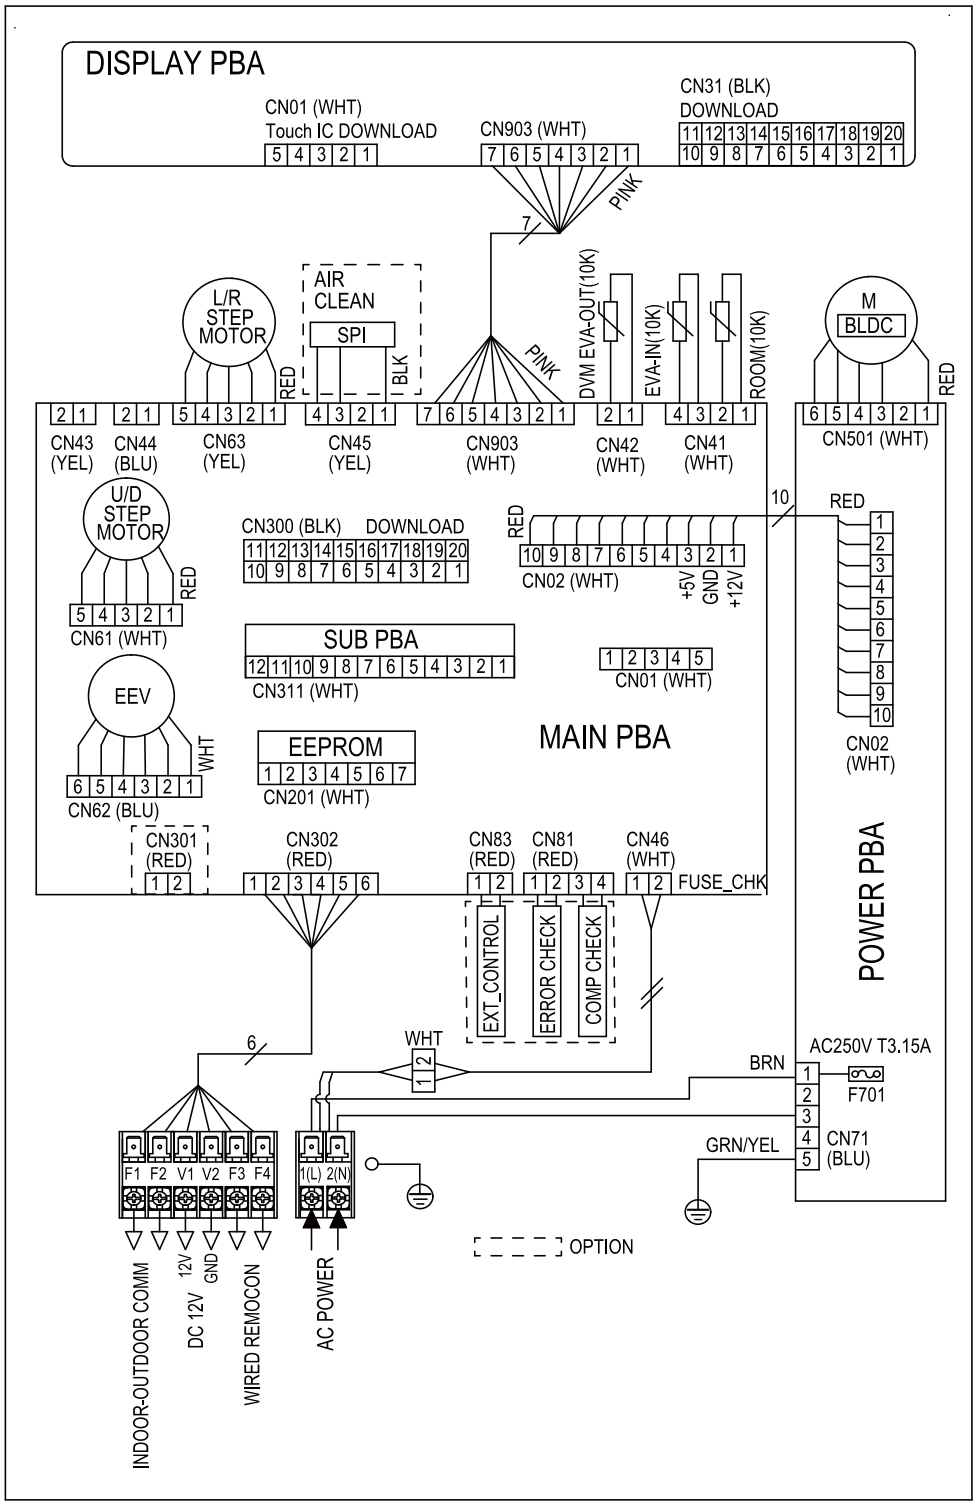

NOTE

1. This wiring diagram applies only to the indoor unit.
2. Symbols show as follow;
   BLK : black, RED : red, BLU : blue, WHT:white, YEL : yellow, BRN : brown, SKY : sky-blue, GRN : green
3. For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remotecontroller transmission F3-F4.
4. ⏚: Protective earth(screw), ▭▭▭▭ : Connector, n/ : The wire quantity

4 Electrical Wiring Diagram

PAC

AM280JNPDKH/TK

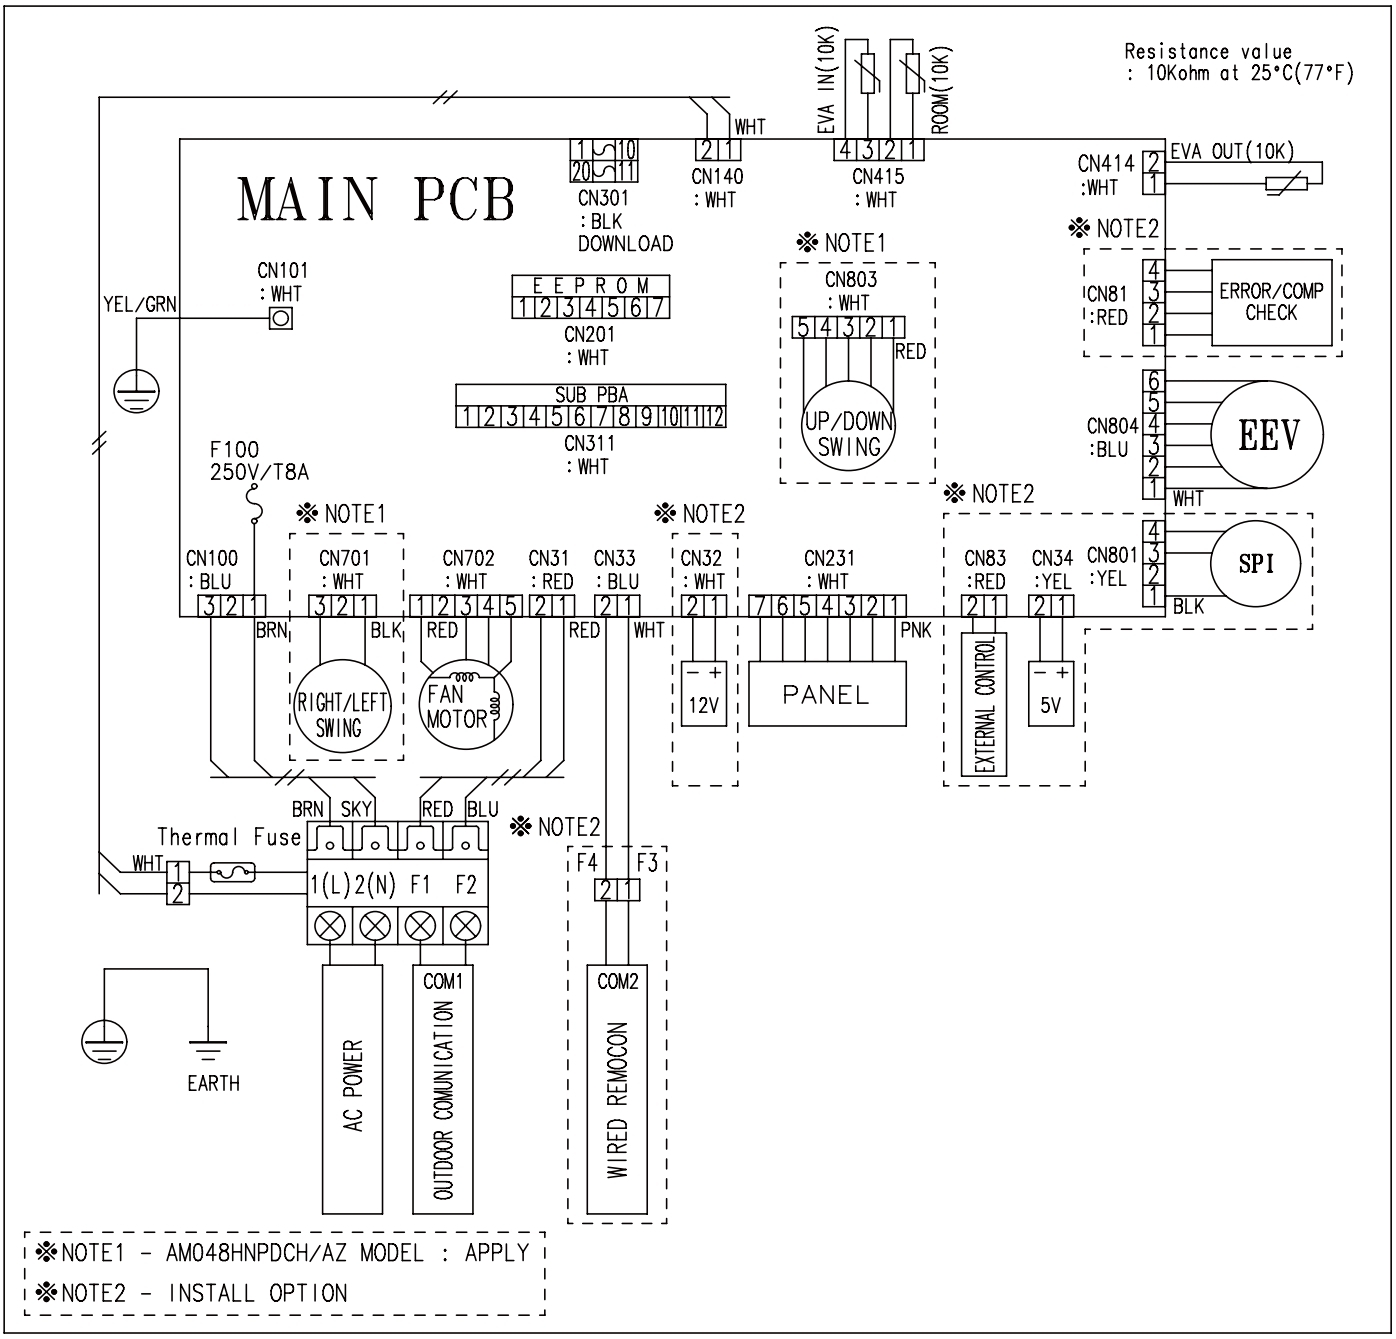

NOTE

1. This wiring diagram applies only to the indoor unit.
2. Symbols show as follow;
   BLK : black, RED : red, BLU : blue, WHT:white, YEL : yellow, BRN : brown, SKY : sky-blue, GRN : green
3. For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remotecontroller transmission F3-F4.
4. ⏚: Protective earth(screw), ▭▭▭▭ : Connector, n : The wire quantity

5 Sound Pressure Level

PAC

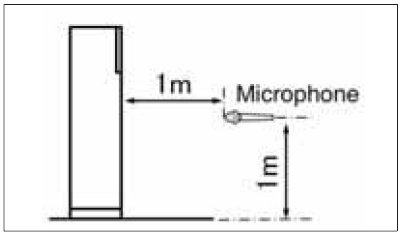

Unit: dB(A)

Model	High	Low
AM140JNPDKH/TK	54	47
AM280JNPDKH/TK	58	54

Note

Specifications may be subject to change without prior notice.
Sound pressure level is obtained in an anechoic room.
Sound pressure level is a relative value, depending on the distance and acoustic environment.
Sound pressure level may differ depending on operation condition.
dBA = A-weighted sound pressure level
Reference acoustic pressure 0 dB= 20 uPa

NC curve

1) AM140JNPDKH/TK

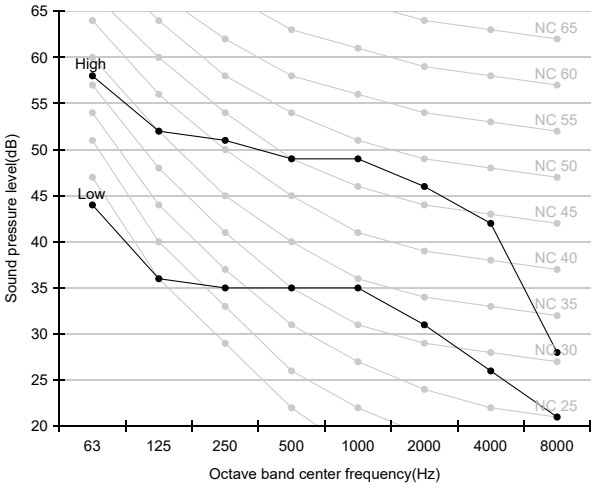

2) AM280JNPDKH/TK

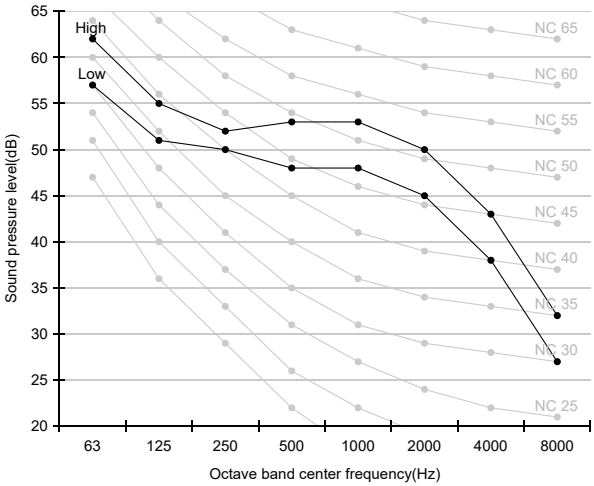

ERV Plus

1 Specifications

2 Capacity Table

3 Dimensional Drawing

4 Electrical Wiring Diagram

5 Sound Pressure Level

6 Fan Characteristics