

360 Cassette

- 1 *Specifications*
- 2 *Capacity Table*
- 3 *Dimensional Drawing*
- 4 *Electrical Wiring Diagram*
- 5 *Sound Pressure Level*
- 6 *Sound Power Level*
- 7 *Temperature and air flow distribution*

1 Specifications

360 Cassette

Type				360 Cassette		360 Cassette		360 Cassette		360 Cassette		
Model				AM045KN4DEH/EU		AM056KN4DEH/EU		AM071KN4DEH/EU		AM090KN4DEH/EU		
Power Supply				Ø, #, V, Hz		1,2,220-240,50		1,2,220-240,50		1,2,220-240,50		
Mode				-		HP/HR		HP/HR		HP/HR		
Performance	Capacity (Nominal)	Cooling	kW		4.50		5.60		7.10		9.00	
			Btu/h		15,400		19,100		24,200		30,700	
		Heating	kW		5.00		6.30		8.00		10.00	
			Btu/h		17,100		21,500		27,300		34,100	
Power	Power Input (Nominal)	Cooling	W	26.00		30.00		34.00		55.00		
		Heating		26.00		30.00		34.00		55.00		
	Current Input (Nominal)	Cooling	A	0.18		0.21		0.25		0.42		
		Heating		0.18		0.21		0.25		0.42		
Fan	Motor	Type	-		Turbo Fan		Turbo Fan		Turbo Fan		Turbo Fan	
		Output x n	w		65 x 1		65 x 1		65 x 1		65 x 1	
	Air Flow Rate	H/M/L (UL)	CMM	14.50 / 13.50 / 12.50		16.00 / 14.50 / 13.50		18.00 / 16.00 / 14.00		22.00 / 18.50 / 16.00		
			l/s	241.67 / 225.00 / 208.33		266.67 / 241.67 / 225.00		300.00 / 266.67 / 233.33		366.67 / 308.33 / 266.67		
	External Pressure	Min/Std/Max	mmAq	-		-		-		-		
			Pa	-		-		-		-		
Piping Connections	Liquid Pipe		Ø, mm	6.35		6.35		9.52		9.52		
			Ø, inch	1/4"		1/4"		3/8"		3/8"		
	Gas Pipe		Ø, mm	12.70		12.70		15.88		15.88		
			Ø, inch	1/2"		1/2"		5/8"		5/8"		
	Drain Pipe		Ø, mm	VP25 (OD 32,ID 25)		VP25 (OD 32,ID 25)		VP25 (OD 32,ID 25)		VP25 (OD 32,ID 25)		
Field Wiring	Power Source Wire		mm²	1.5 - 2.5		1.5 - 2.5		1.5 - 2.5		1.5 - 2.5		
	Transmission Cable		mm²	0.75 - 1.50		0.75 - 1.50		0.75 - 1.50		0.75 - 1.50		
Refrigerant	Type		-	R410A		R410A		R410A		R410A		
	Control Method		-	EEV INCLUDED		EEV INCLUDED		EEV INCLUDED		EEV INCLUDED		
Sound	Pressure	High / Mid / Low	dB(A)	33 / 31 / 29		34 / 32 / 29		36 / 33 / 30		40 / 36 / 32		
	Power	Cooling		50		51		53		57		
Dimension	Net Weight		kg	21.00		21.00		21.00		21.00		
	Shipping Weight		kg	25.00		25.00		25.00		25.00		
	Net Dimensions (WxHxD)		mm	947 x 281 x 947		947 x 281 x 947		947 x 281 x 947		947 x 281 x 947		
	Shipping Dimensions (WxHxD)		mm	990 x 330 x 990		990 x 330 x 990		990 x 330 x 990		990 x 330 x 990		
Panel Size	Panel model		-	PC4NUDMAN		PC4NUDMAN		PC4NUDMAN		PC4NUDMAN		
	Panel Net Weight		kg	3.60		3.60		3.60		3.60		
	Shipping Weight		kg	6.00		6.00		6.00		6.00		
	Net Dimensions (WxHxD)		mm	1,000 x 66 x 1,000		1,000 x 66 x 1,000		1,000 x 66 x 1,000		1,000 x 66 x 1,000		
	Shipping Dimensions (WxHxD)		mm	1,093 x 85 x 1,083		1,093 x 85 x 1,083		1,093 x 85 x 1,083		1,093 x 85 x 1,083		
Additional Accessories	Drain Pump	Drain Pump	- / Model	-		-		-		-		
		Max. lifting Height / Displacement	mm/liter/h	-		-		-		-		
	Air Filter		-	-		-		-		-		

* Specifications may be subject to change without prior notice.

1) Nominal cooling capacities are based on;

- Indoor temperature : 27°C DB, 19°C WB

- Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 5m, Level differences : 0m

2) Nominal heating capacities are based on;

- Indoor temperature : 20°C DB, 15°C WB

- Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 5m, Level differences : 0m

3) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

4) These products contain R410A which is fluorinated greenhouse gas.

5) Panel type is option. (Ceiling Type/Open Type)

About each detail spec, please refer to Dimensional Drawing pages.

* Heat Exchanger type : Fin & Tube (Fin : Al, Tube : Cu)

1 Specifications

360 Cassette

Type				360 Cassette	360 Cassette	360 Cassette
Model				AM112KN4DEH/EU	AM128KN4DEH/EU	AM140KN4DEH/EU
Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50
Mode			-	HP/HR	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling	kW	11.20	12.80	14.00
			Btu/h	38,200	43,700	47,800
		Heating	kW	12.50	13.80	16.00
			Btu/h	42,700	47,100	54,600
Power	Power Input (Nominal)	Cooling	W	53.00	77.00	91.00
		Heating		53.00	77.00	91.00
	Current Input (Nominal)	Cooling	A	0.41	0.62	0.75
		Heating		0.41	0.62	0.75
Fan	Motor	Type	-	Turbo Fan	Turbo Fan	Turbo Fan
		Output x n	w	97 x 1	97 x 1	97 x 1
	Air Flow Rate	H/M/L (UL)	CMM	25.50 / 21.00 / 17.50	29.50 / 24.00 / 19.00	31.50 / 26.50 / 21.00
			l/s	425.00 / 350.00 / 291.67	491.67 / 400.00 / 316.67	525.00 / 441.67 / 350.00
	External Pressure	Min/Std/Max	mmAq Pa	- -	- -	- -
Piping Connections	Liquid Pipe		Ø, mm	9.52	9.52	9.52
			Ø, inch	3/8"	3/8"	3/8"
	Gas Pipe		Ø, mm	15.88	15.88	15.88
			Ø, inch	5/8"	5/8"	5/8"
	Drain Pipe		Ø, mm	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)
Field Wiring	Power Source Wire		mm²	1.5 - 2.5	1.5 - 2.5	1.5 - 2.5
	Transmission Cable		mm²	0.75 - 1.50	0.75 - 1.50	0.75 - 1.50
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
Sound	Pressure	High / Mid / Low	dB(A)	40 / 36 / 32	42 / 38 / 33	44 / 40 / 35
	Power	Cooling		58	60	61
Dimension	Net Weight		kg	24.00	24.00	24.00
	Shipping Weight		kg	29.00	29.00	29.00
	Net Dimensions (WxHxD)		mm	947 x 365 x 947	947 x 365 x 947	947 x 365 x 947
	Shipping Dimensions (WxHxD)		mm	990 x 414 x 990	990 x 414 x 990	990 x 414 x 990
Panel Size	Panel model		-	PC4NUDMAN	PC4NUDMAN	PC4NUDMAN
	Panel Net Weight		kg	3.60	3.60	3.60
	Shipping Weight		kg	6.00	6.00	6.00
	Net Dimensions (WxHxD)		mm	1,000 x 66 x 1,000	1,000 x 66 x 1,000	1,000 x 66 x 1,000
	Shipping Dimensions (WxHxD)		mm	1,093 x 85 x 1,083	1,093 x 85 x 1,083	1,093 x 85 x 1,083
Additional Accessories	Drain Pump	Drain Pump	- / Model	-	-	-
		Max. lifting Height / Displacement	mm/liter/h	-	-	-
	Air Filter		-	-	-	-

* Specifications may be subject to change without prior notice.

1) Nominal cooling capacities are based on;

- Indoor temperature : 27°C DB, 19°C WB

- Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 5m, Level differences : 0m

2) Nominal heating capacities are based on;

- Indoor temperature : 20°C DB, 15°C WB

- Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 5m, Level differences : 0m

3) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

4) These products contain R410A which is fluorinated greenhouse gas.

5) Panel type is option. (Ceiling Type/Open Type)

About each detail spec, please refer to Dimensional Drawing pages.

* Heat Exchanger type : Fin & Tube (Fin : Al, Tube : Cu)

2 Capacity table

360 Cassette

Cooling

TC : Total Capacity, SHC : Sensible Heat Capacity

Model	Outdoor Air Temp. (DB)	Indoor temperature													
		20 (°C, DB) 14 (°C, WB)		23 (°C, DB) 16 (°C, WB)		26 (°C, DB) 18 (°C, WB)		27 (°C, DB) 19 (°C, WB)		28 (°C, DB) 20 (°C, WB)		30 (°C, DB) 22 (°C, WB)		32 (°C, DB) 24 (°C, WB)	
		TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)
4.50	10.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.40	2.90
	12.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.40	2.90
	14.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.40	2.90
	16.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	18.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	20.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	21.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	23.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	25.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	27.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	29.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	31.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	33.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
	35.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.70	3.10	5.00	3.10	5.30	2.80
37.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.60	3.00	4.90	3.00	5.20	2.70	
39.0	3.10	2.70	3.70	2.80	4.20	3.00	4.50	3.10	4.60	3.00	4.90	3.00	5.10	2.60	
5.60	10.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.30	3.90	6.70	3.70
	12.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.30	3.90	6.70	3.70
	14.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.70	3.70
	16.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	18.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	20.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	21.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	23.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	25.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	27.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20	3.80	6.60	3.60
	29.0	3.90	3.20	4.60	3.50	5.30	3.90	5.60	3.90	5.80	3.90	6.20			

2 Capacity table

360 Cassette

Cooling

TC : Total Capacity, SHC : Sensible Heat Capacity

Model	Outdoor Air Temp. (DB)	Indoor temperature													
		20 (°C, DB) 14 (°C, WB)		23 (°C, DB) 16 (°C, WB)		26 (°C, DB) 18 (°C, WB)		27 (°C, DB) 19 (°C, WB)		28 (°C, DB) 20 (°C, WB)		30 (°C, DB) 22 (°C, WB)		32 (°C, DB) 24 (°C, WB)	
		TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)	TC(kW)	SHC(kW)
12.80	10.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.30	9.10	15.40	9.10
	12.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.30	9.10	15.30	9.00
	14.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.30	9.10	15.30	9.00
	16.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.20	8.90
	18.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	20.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	21.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	23.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	25.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	27.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	29.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	31.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	33.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	35.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.30	9.10	14.20	9.00	15.10	8.80
	37.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.10	13.20	9.00	14.00	8.90	14.90	8.70
	39.0	8.80	7.30	10.40	8.10	12.00	9.00	12.80	9.20	13.10	8.90	13.80	8.80	14.50	8.60
14.00	10.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.60	9.60	15.70	9.50	16.80	9.70
	12.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.60	9.60	16.70	9.60
	14.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.60	9.60	16.70	9.60
	16.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.60	9.60	16.60	9.50
	18.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.60	9.50
	20.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	21.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	23.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	25.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	27.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	29.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	31.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	33.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	35.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.50	9.50	16.50	9.40
	37.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.50	9.60	15.40	9.40	16.30	9.20
	39.0	9.70	7.70	11.40	8.50	13.10	9.40	14.00	9.60	14.40	9.40	15.10	9.30	15.90	9.00

2 Capacity table

360 Cassette

Heating

TC : Total Capacity

Model	Outdoor Air Temp. (°C)		Indoor temperature				
	DB	WB	16 (°C, DB) TC(kW)	18 (°C, DB) TC(kW)	20 (°C, DB) TC(kW)	22 (°C, DB) TC(kW)	24 (°C, DB) TC(kW)
4.50	-20.0	-21.0	3.10	3.10	2.90	2.90	2.90
	-17.0	-18.0	3.20	3.20	3.10	3.00	3.00
	-15.0	-16.0	3.30	3.30	3.20	3.10	3.00
	-12.0	-13.0	3.50	3.40	3.40	3.30	3.20
	-10.0	-11.0	3.70	3.60	3.60	3.50	3.50
	-7.0	-8.0	3.90	3.80	3.80	3.70	3.60
	-5.0	-6.0	4.10	4.00	4.00	3.90	3.70
	-3.0	-4.0	4.30	4.20	4.20	4.00	3.90
	0.0	-1.0	4.50	4.40	4.40	4.20	4.00
	3.0	2.2	4.70	4.70	4.60	4.40	4.20
	5.0	4.1	4.90	4.90	4.80	4.50	4.20
	7.0	6.0	5.10	5.10	5.00	4.60	4.20
	9.0	7.9	5.30	5.20	5.00	4.60	4.20
	11.0	9.8	5.50	5.20	5.00	4.60	4.20
	13.0	12.0	5.60	5.30	5.00	4.60	4.20
	15.0	14.0	5.80	5.40	5.00	4.60	4.20
5.60	-20.0	-21.0	3.90	3.80	3.80	3.70	3.70
	-17.0	-18.0	4.00	4.00	3.90	3.80	3.80
	-15.0	-16.0	4.20	4.10	4.00	3.90	3.80
	-12.0	-13.0	4.40	4.30	4.20	4.20	4.10
	-10.0	-11.0	4.60	4.60	4.50	4.40	4.40
	-7.0	-8.0	4.90	4.80	4.80	4.70	4.50
	-5.0	-6.0	5.20	5.10	5.00	4.90	4.70
	-3.0	-4.0	5.40	5.30	5.30	5.10	4.90
	0.0	-1.0	5.70	5.60	5.50	5.30	5.00
	3.0	2.2	5.90	5.90	5.80	5.60	5.30
	5.0	4.1	6.20	6.10	6.00	5.70	5.30
	7.0	6.0	6.50	6.40	6.30	5.80	5.30
	9.0	7.9	6.70	6.50	6.30	5.80	5.30
	11.0	9.8	6.90	6.60	6.30	5.80	5.30
	13.0	12.0	7.10	6.70	6.30	5.80	5.30
	15.0	14.0	7.30	6.80	6.30	5.80	5.30
7.10	-20.0	-21.0	4.90	4.90	4.80	4.70	4.70
	-17.0	-18.0	5.10	5.00	4.90	4.80	4.80
	-15.0	-16.0	5.30	5.20	5.10	4.90	4.80
	-12.0	-13.0	5.60	5.50	5.40	5.30	5.20
	-10.0	-11.0	5.90	5.80	5.70	5.60	5.60
	-7.0	-8.0	6.20	6.10	6.00	5.90	5.80
	-5.0	-6.0	6.50	6.50	6.40	6.20	6.00
	-3.0	-4.0	6.90	6.80	6.70	6.40	6.20
	0.0	-1.0	7.20	7.10	7.00	6.70	6.40
	3.0	2.2	7.60	7.50	7.30	7.10	6.80
	5.0	4.1	7.90	7.80	7.70	7.20	6.80
	7.0	6.0	8.20	8.10	8.00	7.40	6.80
	9.0	7.9	8.50	8.20	8.00	7.40	6.80
	11.0	9.8	8.70	8.40	8.00	7.40	6.80
	13.0	12.0	9.00	8.50	8.00	7.40	6.80
	15.0	14.0	9.20	8.60	8.00	7.40	6.80
9.00	-20.0	-21.0	6.00	6.00	5.90	5.80	5.80
	-17.0	-18.0	6.30	6.30	6.10	6.00	5.90
	-15.0	-16.0	6.70	6.50	6.30	6.10	6.00
	-12.0	-13.0	7.00	6.90	6.70	6.60	6.50
	-10.0	-11.0	7.30	7.20	7.10	7.00	7.00
	-7.0	-8.0	7.80	7.70	7.60	7.40	7.20
	-5.0	-6.0	8.20	8.10	8.00	7.70	7.50
	-3.0	-4.0	8.60	8.50	8.40	8.10	7.70
	0.0	-1.0	9.00	8.90	8.80	8.40	8.00
	3.0	2.2	9.40	9.30	9.20	8.80	8.40
	5.0	4.1	9.90	9.70	9.60	9.00	8.40
	7.0	6.0	10.30	10.10	10.00	9.20	8.40
	9.0	7.9	10.60	10.30	10.00	9.20	8.40
	11.0	9.8	10.90	10.50	10.00	9.20	8.40
	13.0	12.0	11.20	10.60	10.00	9.20	8.40
	15.0	14.0	11.60	10.80	10.00	9.20	8.40
11.20	-20.0	-21.0	7.40	7.40	7.30	7.30	7.30
	-17.0	-18.0	8.00	7.80	7.60	7.50	7.40
	-15.0	-16.0	8.40	8.10	7.90	7.70	7.50
	-12.0	-13.0	8.80	8.60	8.40	8.20	8.10
	-10.0	-11.0	9.20	9.00	8.90	8.80	8.70
	-7.0	-8.0	9.70	9.60	9.40	9.20	9.00
	-5.0	-6.0	10.20	10.10	9.90	9.60	9.30
	-3.0	-4.0	10.70	10.60	10.50	10.10	9.70
	0.0	-1.0	11.30	11.10	11.10	10.50	10.00
	3.0	2.2	11.80	11.60	11.50	11.00	10.60
	5.0	4.1	12.30	12.20	12.00	11.30	10.60
	7.0	6.0	12.90	12.70	12.50	11.50	10.60
	9.0	7.9	13.30	12.90	12.50	11.50	10.60
	11.0	9.8	13.70	13.10	12.50	11.50	10.60
	13.0	12.0	14.00	13.30	12.50	11.50	10.60
	15.0	14.0	14.40	13.50	12.50	11.50	10.60

2 Capacity table

360 Cassette

Heating


TC : Total Capacity

Model	Outdoor Air Temp. (°C)		Indoor temperature				
	DB	WB	16 (°C, DB)	18 (°C, DB)	20 (°C, DB)	22 (°C, DB)	24 (°C, DB)
12.80	-20.0	-21.0	8.10	8.10	8.00	8.00	8.00
	-17.0	-18.0	8.70	8.50	8.40	8.30	8.10
	-15.0	-16.0	9.20	9.00	8.70	8.50	8.20
	-12.0	-13.0	9.70	9.50	9.30	9.10	8.90
	-10.0	-11.0	10.10	10.00	9.90	9.70	9.60
	-7.0	-8.0	10.70	10.60	10.40	10.20	10.00
	-5.0	-6.0	11.30	11.10	11.00	10.70	10.30
	-3.0	-4.0	11.90	11.70	11.50	11.10	10.70
	0.0	-1.0	12.40	12.30	12.10	11.60	11.00
	3.0	2.2	13.00	12.90	12.70	12.20	11.70
	5.0	4.1	13.60	13.40	13.20	12.40	11.70
	7.0	6.0	14.20	14.00	13.80	12.70	11.70
	9.0	7.9	14.60	14.20	13.80	12.70	11.70
	11.0	9.8	15.10	14.40	13.80	12.70	11.70
	13.0	12.0	15.50	14.70	13.80	12.70	11.70
	15.0	14.0	15.90	14.90	13.80	12.70	11.70
14.00	-20.0	-21.0	9.50	9.50	9.40	9.40	9.30
	-17.0	-18.0	10.00	9.90	9.60	9.60	9.40
	-15.0	-16.0	10.70	10.40	10.10	9.80	9.50
	-12.0	-13.0	11.20	11.00	10.80	10.60	10.30
	-10.0	-11.0	11.70	11.60	11.40	11.30	11.10
	-7.0	-8.0	12.40	12.20	12.10	11.80	11.50
	-5.0	-6.0	13.10	12.90	12.70	12.30	12.00
	-3.0	-4.0	13.80	13.60	13.40	12.90	12.40
	0.0	-1.0	14.40	14.20	14.00	13.40	12.80
	3.0	2.2	15.10	14.90	14.70	14.10	13.50
	5.0	4.1	15.80	15.60	15.30	14.40	13.50
	7.0	6.0	16.50	16.20	16.00	14.80	13.50
	9.0	7.9	17.00	16.50	16.00	14.80	13.50
	11.0	9.8	17.50	16.70	16.00	14.80	13.50
	13.0	12.0	18.00	17.00	16.00	14.80	13.50
	15.0	14.0	18.50	17.20	16.00	14.80	13.50

3 Dimensional drawing

360 Cassette

AM045KN4DEH/EU, AM056KN4DEH/EU, AM071KN4DEH/EU, AM090KN4DEH/EU

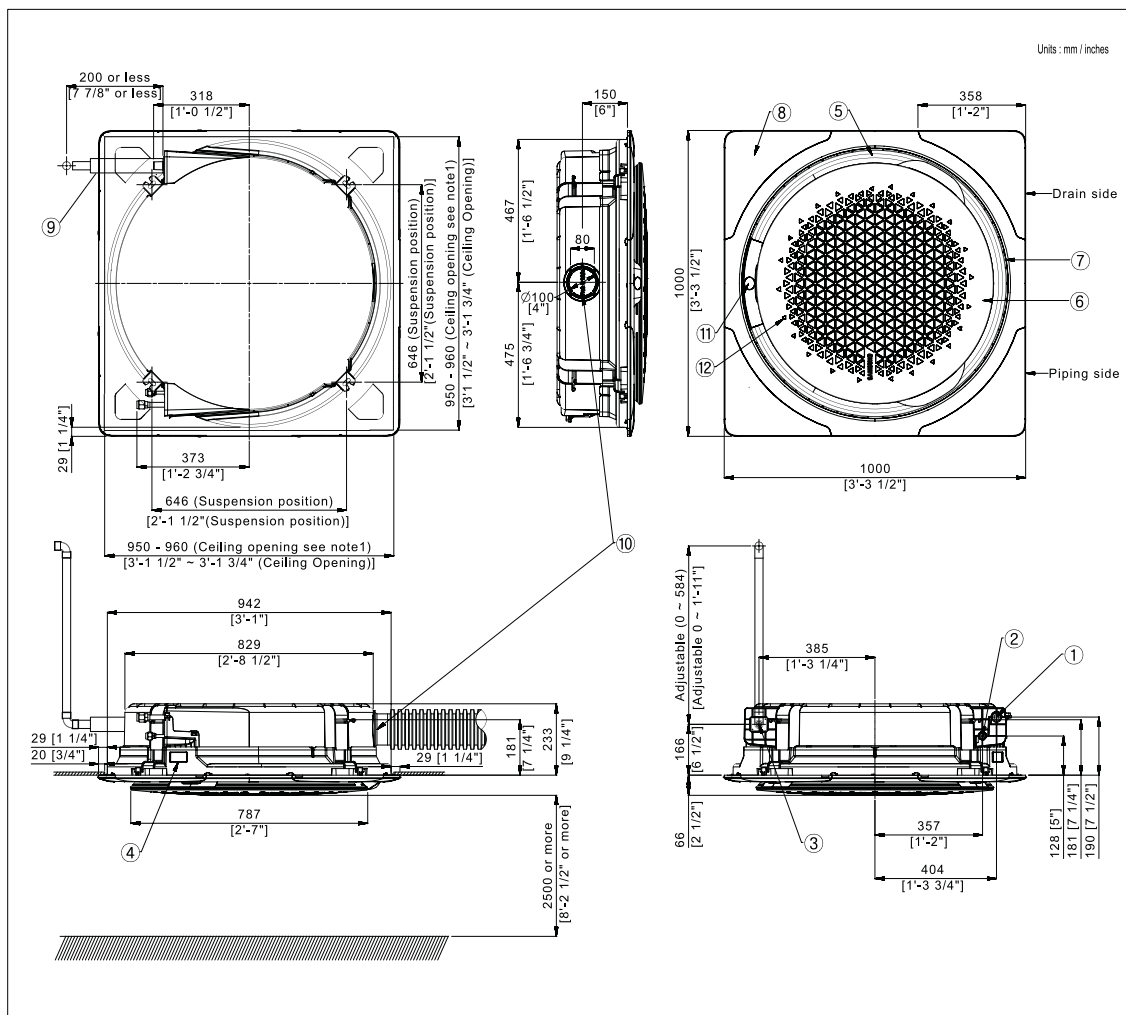

Note

1. Make sure the spacing between the ceiling and the cassette is no more than 10mm[3/8"].
2. When the conditions exceed 30°C[86°F] and RH 80% in the ceiling or fresh air is induced into the ceiling, and additional insulation is required (polyethylene foam, thickness 10mm[3/8"] or more)
3. Ceiling type panel model code : PC4NUDMAN


Table of descriptions

1	Refrigerant gas pipe	7	Suction rim for Booster fan
2	Refrigerant liquid pipe	8	Decoration cover
3	Condensate drain	9	Drain hose
4	Power & Comm. wiring conduits	10	Fresh air intake knock out hole
5	Air discharge opening	11	Display window
6	Air suction grille	12	Infrared receiver

3 Dimensional drawing

360 Cassette

AM112KN4DEH/EU, AM128KN4DEH/EU, AM140KN4DEH/EU

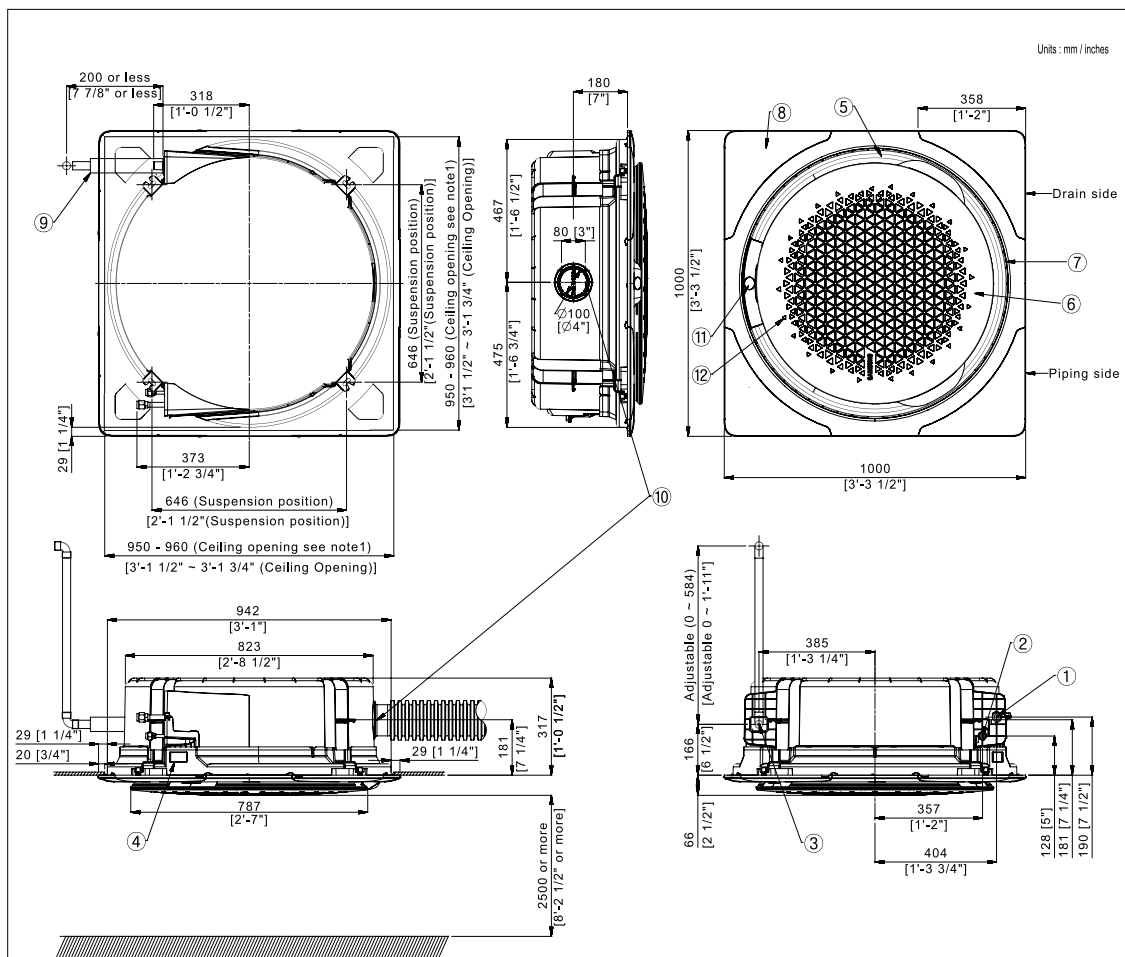

Note

1. Make sure the spacing between the ceiling and the cassette is no more than 29mm[1 1/4"]. Max ceiling opening : 960mm[3'-1 3/4"]
2. When the conditions exceed 30 °C and RH 80% in the ceiling or fresh air is induced into the ceiling, and additional insulation is required (polyethylene foam, thickness 10mm[3/8"] or more)
3. Ceiling type panel model code : PC4NUDMAN


Table of descriptions

1	Refrigerant gas pipe	7	Suction rim for Booster fan
2	Refrigerant liquid pipe	8	Corner decoration cover
3	Condensate drain	9	Drain hose
4	Power & Comm. wiring conduits	10	Fresh air intake knock out hole
5	Air discharge opening	11	Display window
6	Air suction grille	12	Infrared receiver

3 Dimensional drawing

360 Cassette

AM045KN4DEH/EU, AM056KN4DEH/EU, AM071KN4DEH/EU, AM090KN4DEH/EU

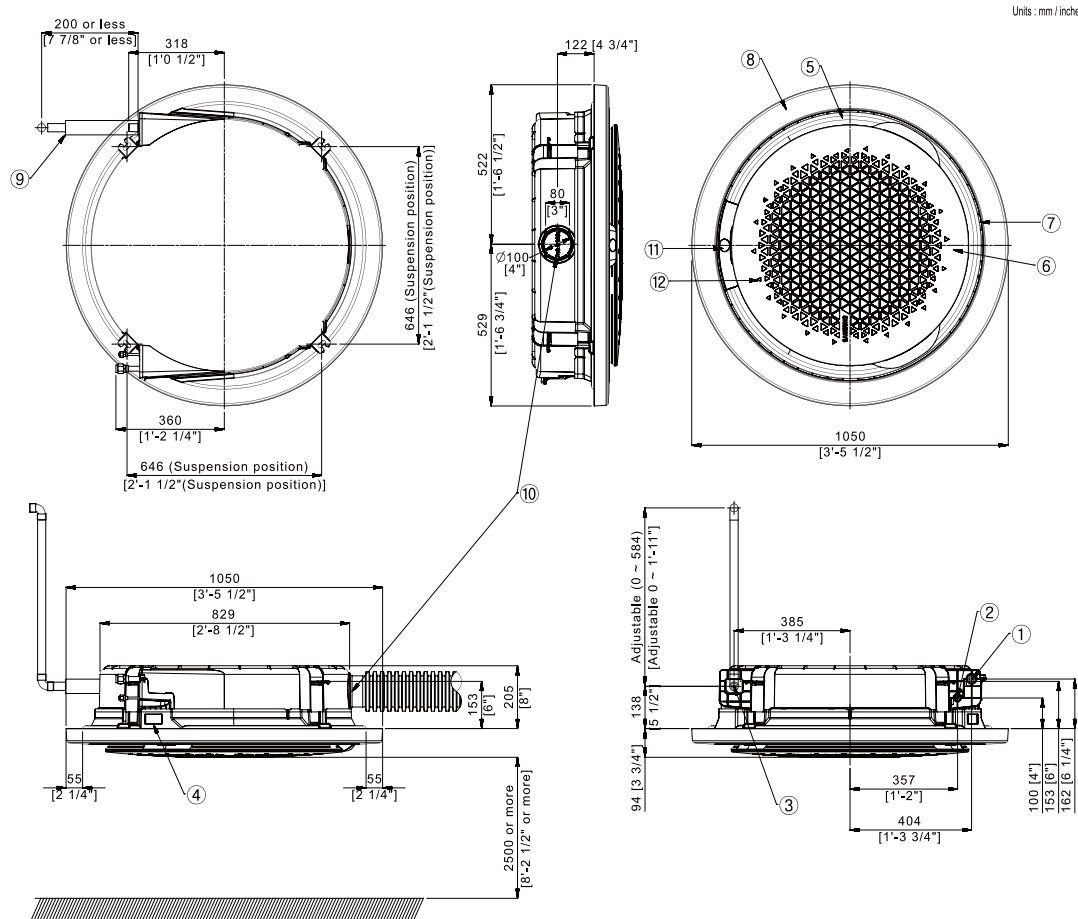

Note

1. Make sure the spacing between the ceiling and the cassette is no more than 10mm[3/8"].
2. When the conditions exceed 30°C[86°F] and RH 80% in the ceiling or fresh air is induced into the ceiling, and additional insulation is required (polyethylene foam, thickness 10mm[3/8"] or more).
3. Open type panel model code : PC4NUNMAN
4. The circular panel is by default available in exposed installation.
5. Make inspection holes on the ceiling for easier installation and maintenance, as shown in the following table.
(The size of an inspection hole must be at least 450 mm x 450 mm.)
6. A suspended ceiling structure can substitute for the inspection holes.

Category	Inspection hole		
	Recessed installation		Exposed installation
Square panel	Integrated	Suspended	-
Circular panel	2 ea		


Table of descriptions

1	Refrigerant gas pipe	7	Suction rim for Booster fan
2	Refrigerant liquid pipe	8	Decoration cover
3	Condensate drain	9	Drain hose
4	Power & Comm. wiring conduits	10	Fresh air intake knock out hole
5	Air discharge opening	11	Display window
6	Air suction grille	12	Infrared receiver

3 Dimensional drawing

360 Cassette

AM112KN4DEH/EU, AM128KN4DEH/EU, AM140KN4DEH/EU

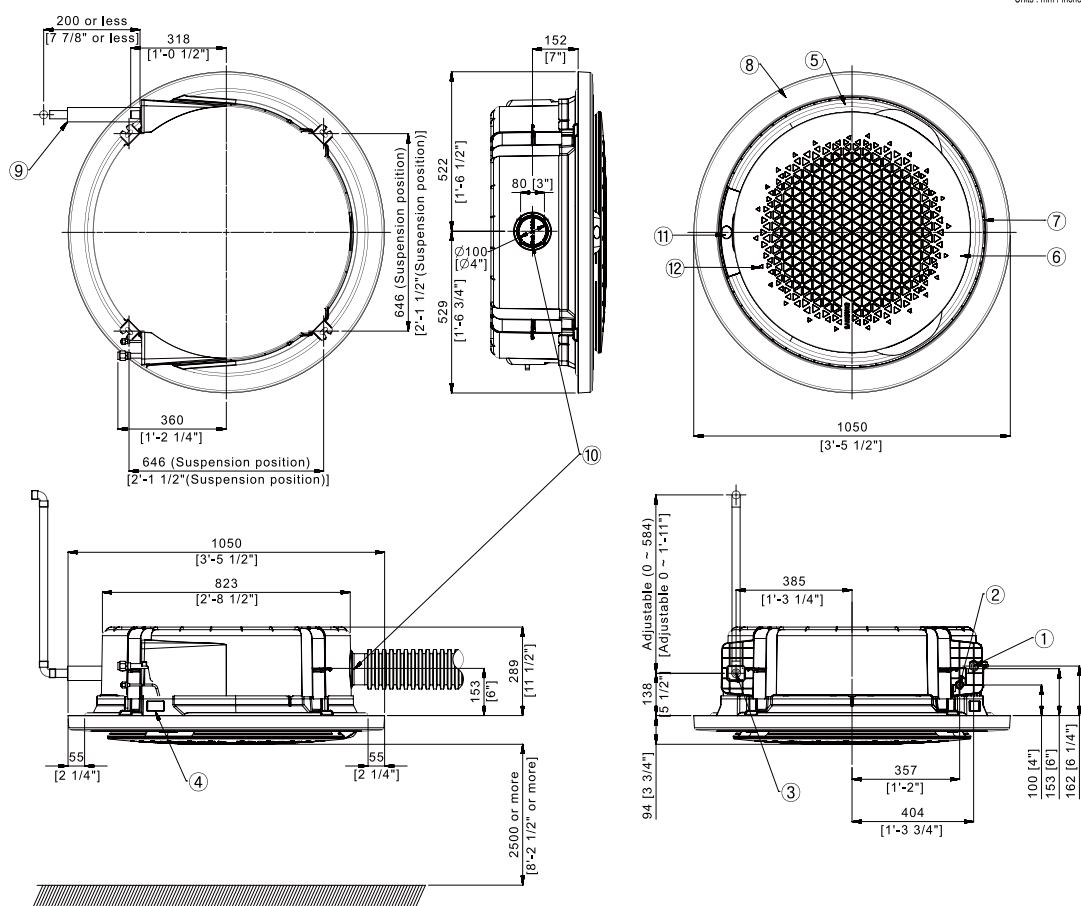

Note

- Make sure the spacing between the ceiling and the cassette is no more than 10mm[3/8"].
- When the conditions exceed 30℃[86°F] and RH 80% in the ceiling or fresh air is induced into the ceiling, and additional insulation is required (polyethylene foam, thickness 10mm[3/8"] or more).
- Open type panel model code : PC4NUNMAN
- The circular panel is by default available in exposed installation.
- Make inspection holes on the ceiling for easier installation and maintenance, as shown in the following table.
(The size of an inspection hole must be at least 450 mm x 450 mm.)
- A suspended ceiling structure can substitute for the inspection holes.

Category	Inspection hole		
	Recessed installation		Exposed installation
	Integrated	Suspended	
Square panel	1 ea		
Circular panel	2 ea		


Table of descriptions

1	Refrigerant gas pipe	7	Suction rim for Booster fan
2	Refrigerant liquid pipe	8	Decoration cover
3	Condensate drain	9	Drain hose
4	Power & Comm. wiring conduits	10	Fresh air intake knock out hole
5	Air discharge opening	11	Display window
6	Air suction grille	12	Infrared receiver

4 Electrical wiring diagram

360 Cassette

AM045KN4DEH/EU, AM056KN4DEH/EU, AM071KN4DEH/EU, AM090KN4DEH/EU, AM112KN4DEH/EU, AM128KN4DEH/EU, AM140KN4DEH/EU

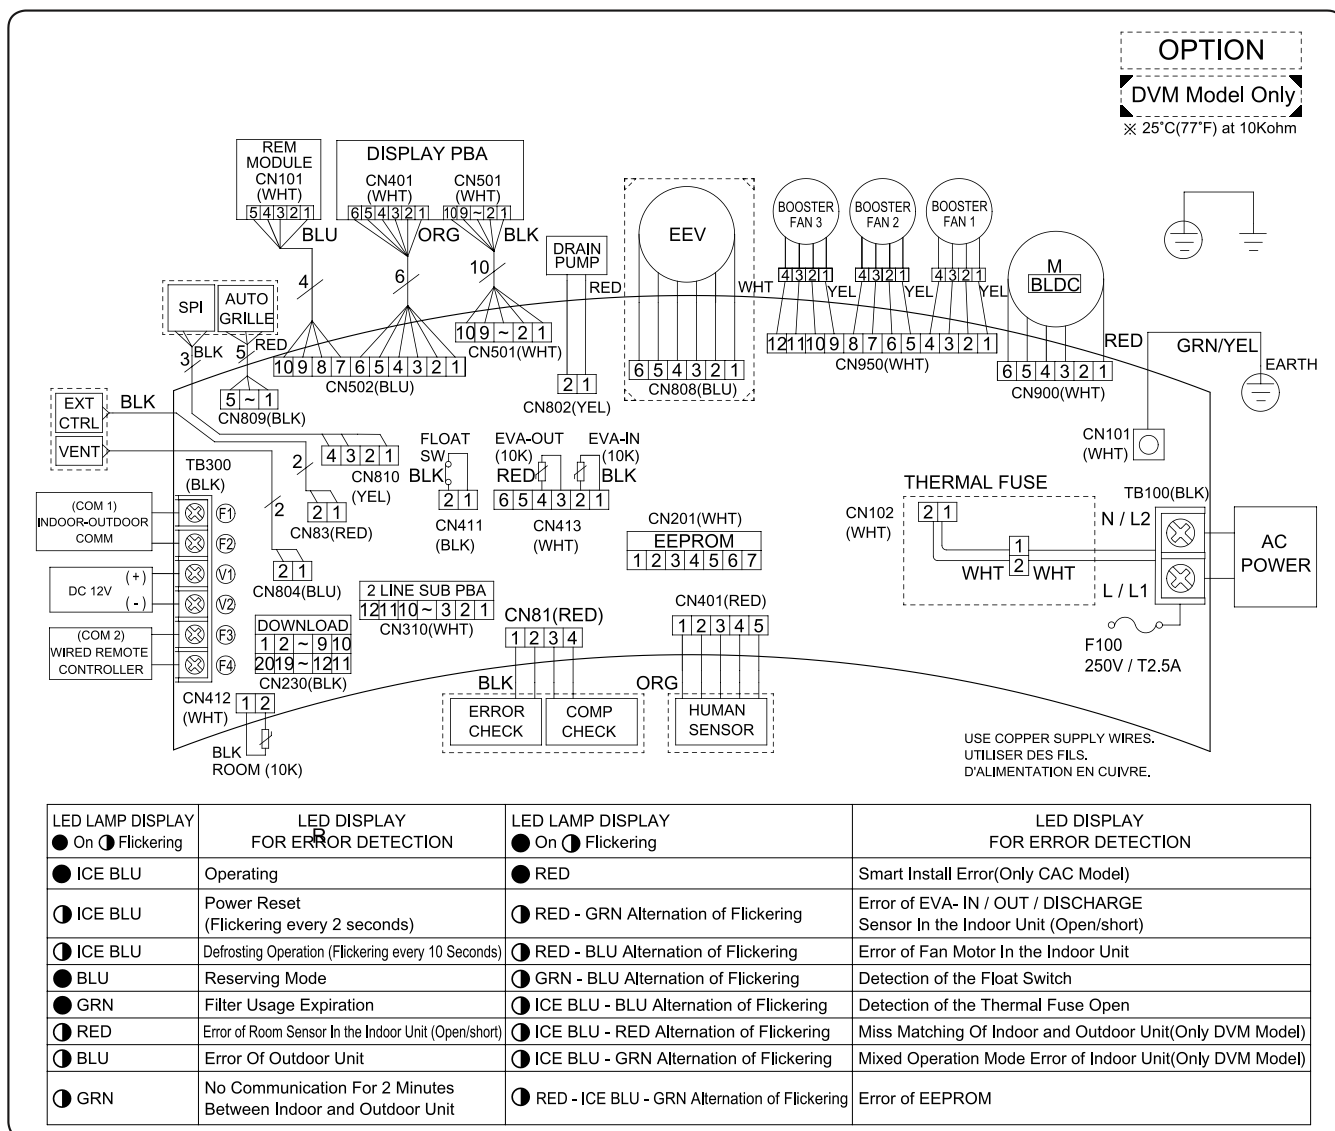


M-BLDC	BLDC Motor	SPI	S-Plasma ion	ROOM(10K)	Thermistor ROOM OUT(10K)
Thermal Fuse	Terminal Block thermal fuse	EEV	Electronic Expansion Valve	EVA-IN(10K)	Thermistor EVA IN(10K)
		F100	Main fuse, 250V/T2.5A	EVA-OUT(10K)	Thermistor EVA OUT(10K)

NOTE

- This wiring diagram applies only to the indoor unit.
- Symbols show as follow :
BLK: black, RED: red, BLU: blue, WHT: white, YEL: yellow, BRN: brown, SKY: sky blue, GRN: green
- For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remote controller transmission F3-F4.
- Protective earth(SCREW)

5 Sound pressure level

360 Cassette

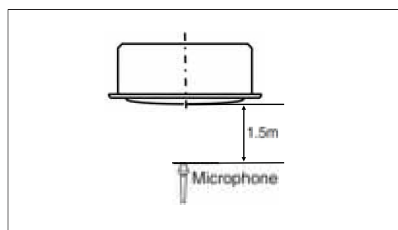

Unit: dB(A)


Model	High	Low
AM045KN4DEH/EU	33	29
AM056KN4DEH/EU	34	29
AM071KN4DEH/EU	36	30
AM090KN4DEH/EU	40	32

Note


Specifications may be subject to change without prior notice.
 Sound pressure level is obtained in an anechoic room.
 Sound pressure level is a relative value, depending on the distance and acoustic environment.
 Sound pressure level may differ depending on operation condition.
 dBA = A-weighted sound pressure level
 Reference acoustic pressure 0 dB= 20 uPa

NC curve


1) AM045KN4DEH/EU

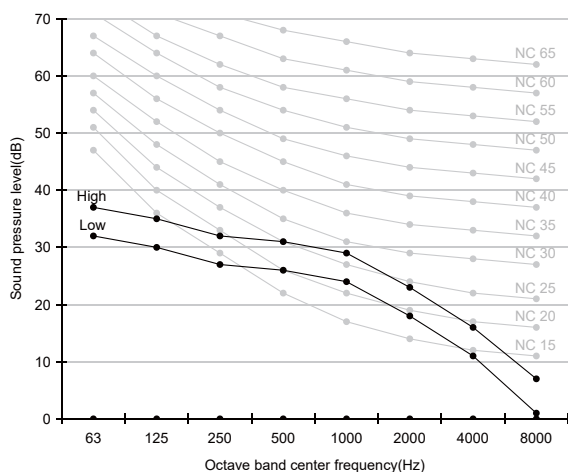


2) AM056KN4DEH/EU

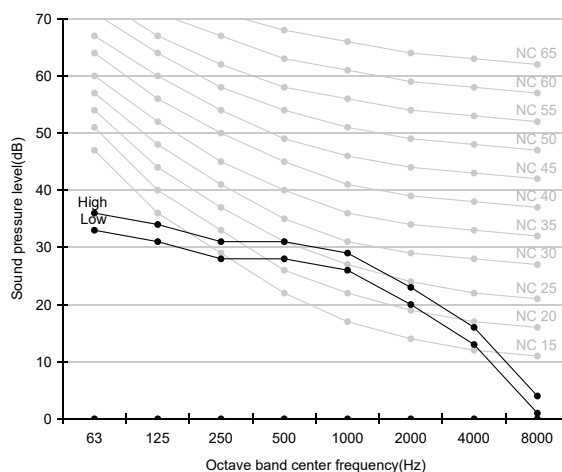

3) AM071KN4DEH/EU

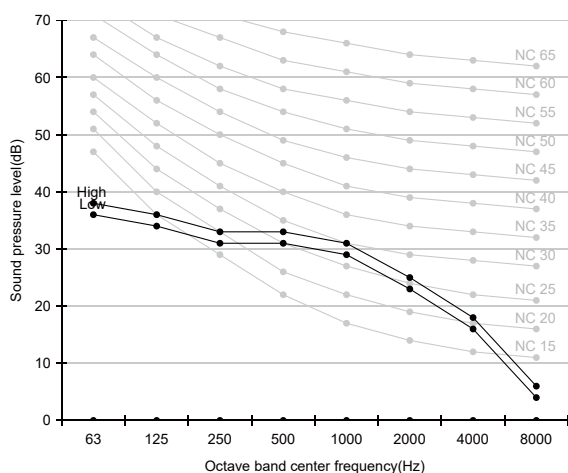


4) AM090KN4DEH/EU

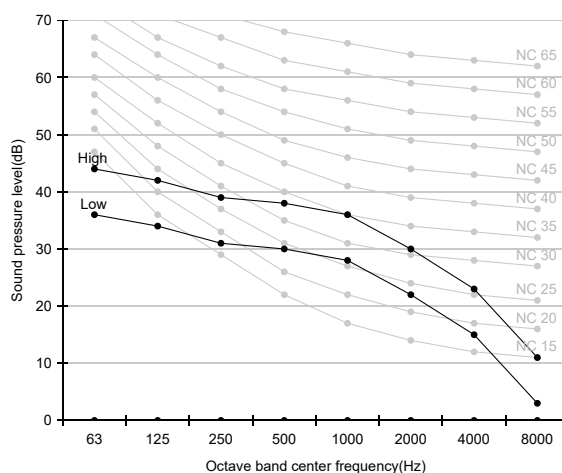

5 Sound pressure level

360 Cassette

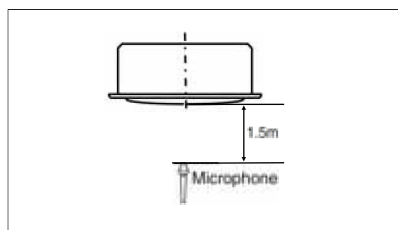

Unit: dB(A)


Model	High	Low
AM112KN4DEH/EU	40	32
AM128KN4DEH/EU	42	33
AM140KN4DEH/EU	44	35

Note


Specifications may be subject to change without prior notice.
 Sound pressure level is obtained in an anechoic room.
 Sound pressure level is a relative value, depending on the distance and acoustic environment.
 Sound pressure level may differ depending on operation condition.
 dBA = A-weighted sound pressure level
 Reference acoustic pressure 0 dB= 20 uPa

NC curve


1) AM112KN4DEH/EU

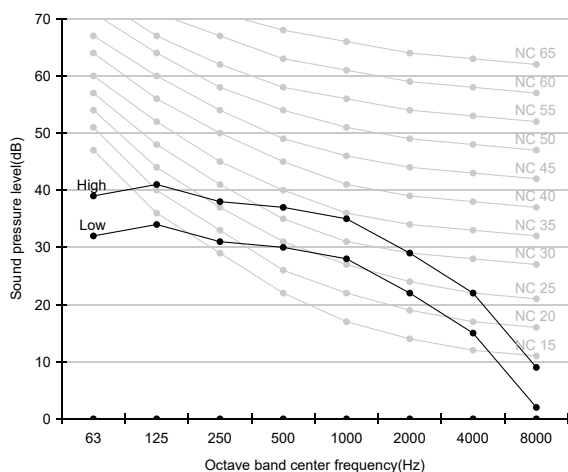

2) AM128KN4DEH/EU

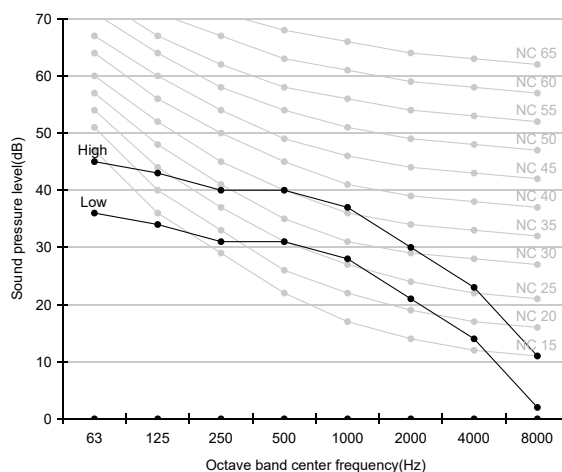

3) AM140KN4DEH/EU

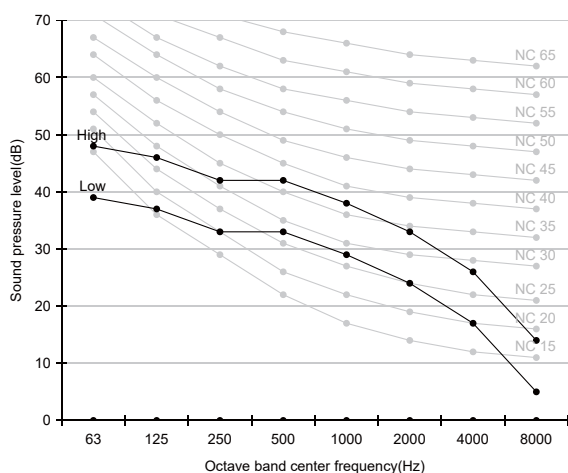

6 Sound power level

360 Cassette


Note

- . Specifications may be subject to change without prior notice.
- . Sound power level is an absolute value that a sound source generates.
- . dBA = A-weighted sound power level.
- . Reference power : 1pW.
- . Measured according to ISO 3741


Unit: dB(A)

Model	Power
AM045KN4DEH/EU	50
AM056KN4DEH/EU	51
AM071KN4DEH/EU	53
AM090KN4DEH/EU	57


1)AM045KN4DEH/EU

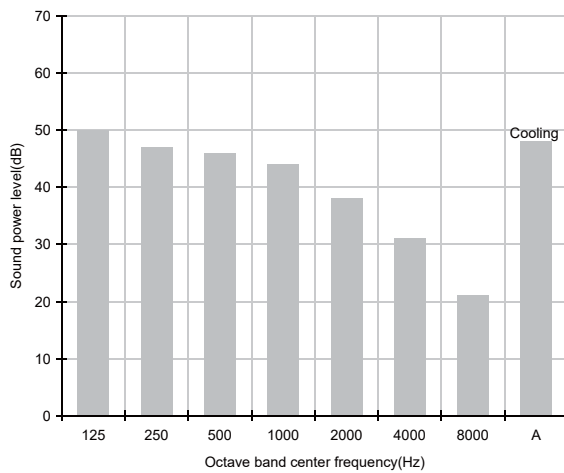


2)AM056KN4DEH/EU

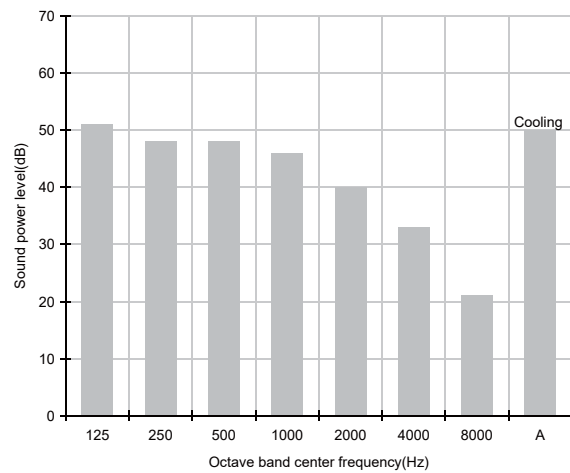

3)AM071KN4DEH/EU

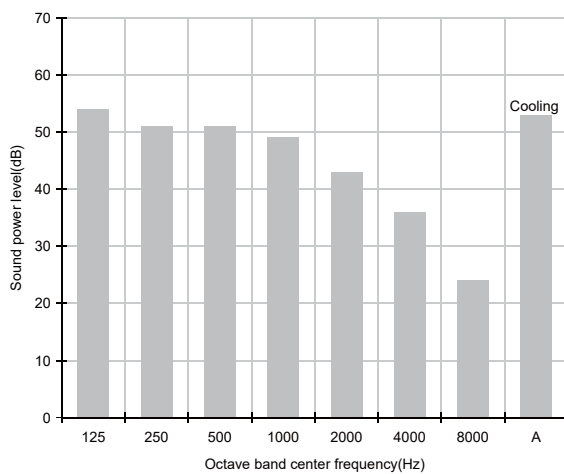

4)AM090KN4DEH/EU

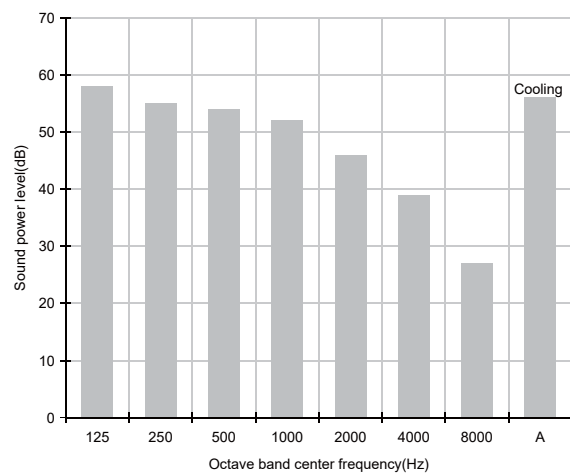

6 Sound power level

360 Cassette


Note

- . Specifications may be subject to change without prior notice.
- . Sound power level is an absolute value that a sound source generates.
- . dBA = A-weighted sound power level.
- . Reference power : 1pW.
- . Measured according to ISO 3741


Unit: dB(A)

Model	Power
AM112KN4DEH/EU	58
AM128KN4DEH/EU	60
AM140KN4DEH/EU	61


1)AM112KN4DEH/EU

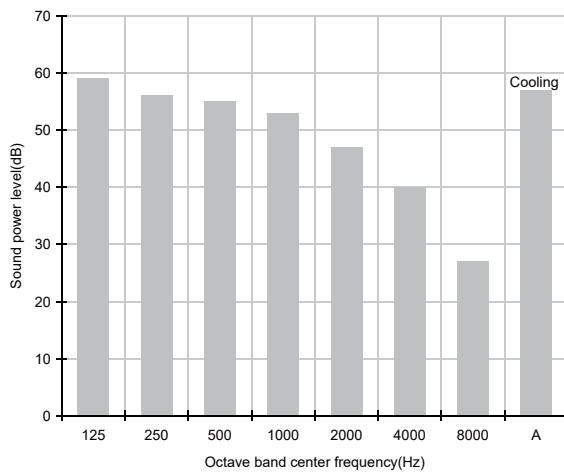

2)AM128KN4DEH/EU

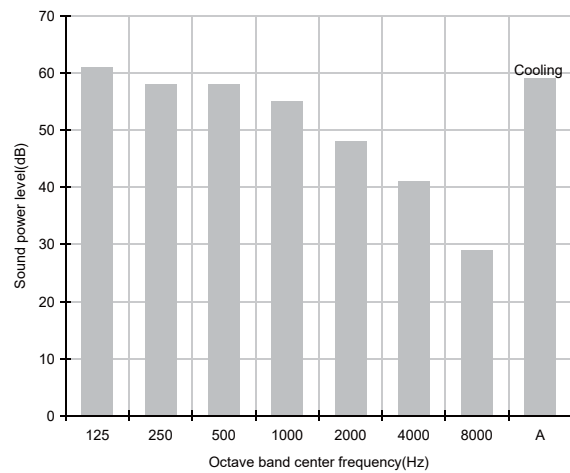

3)AM140KN4DEH/EU

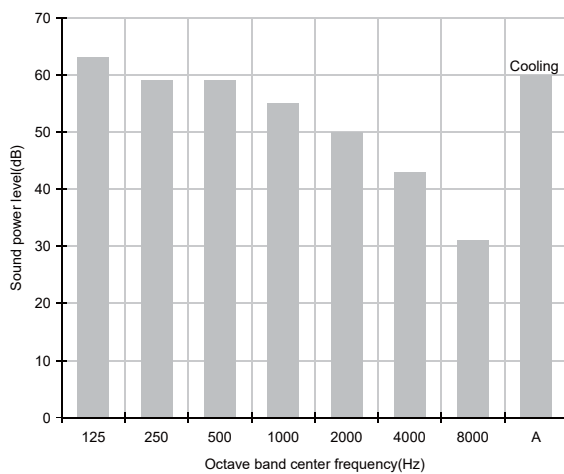


7 Temperature and air flow distribution

360 Cassette

AM045KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

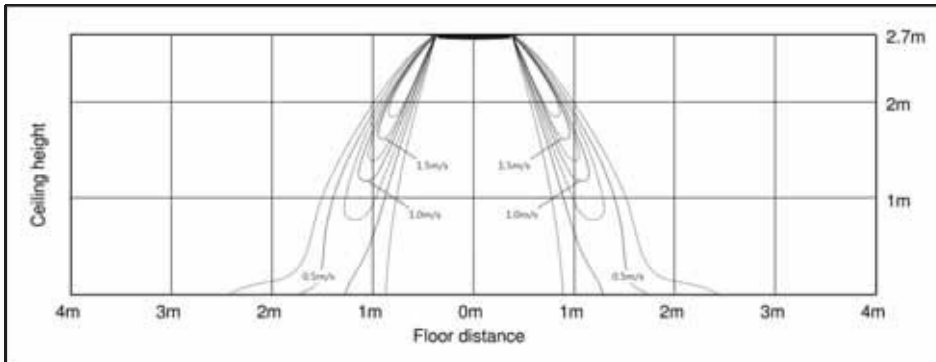


(2) Cooling temperature distribution

Discharge angle : 60°

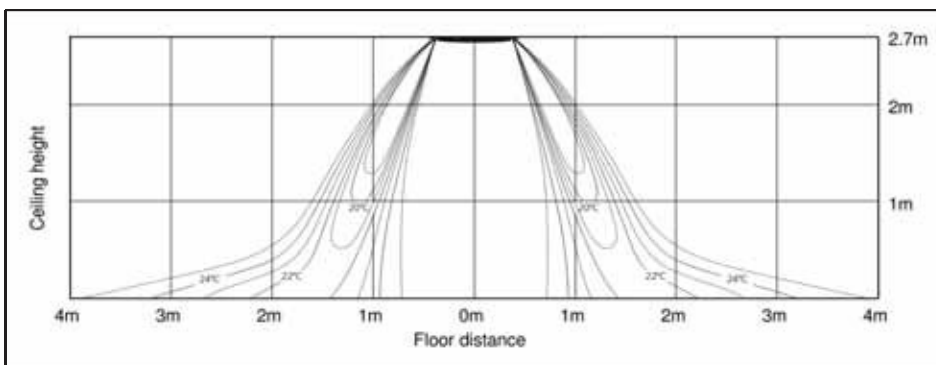


(3) Heating air velocity distribution

Discharge angle : 60°

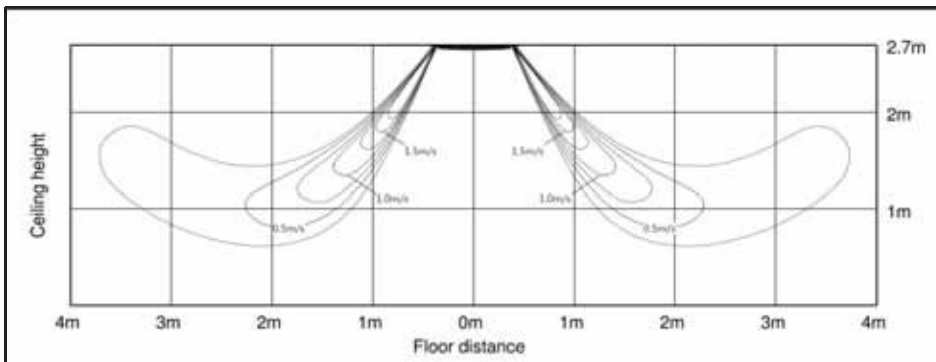

(4) Heating temperature distribution

Discharge angle : 60°

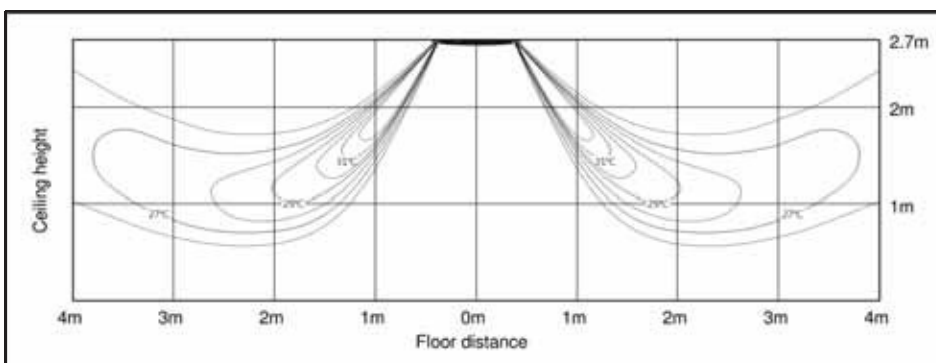


7 Temperature and air flow distribution

360 Cassette

AM056KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

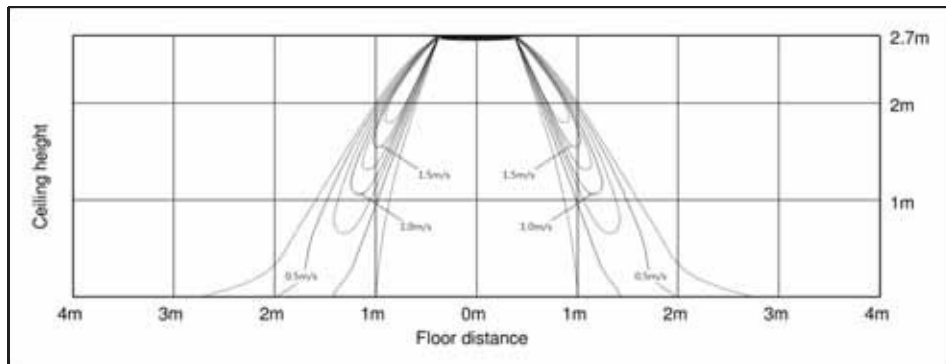


(2) Cooling temperature distribution

Discharge angle : 60°

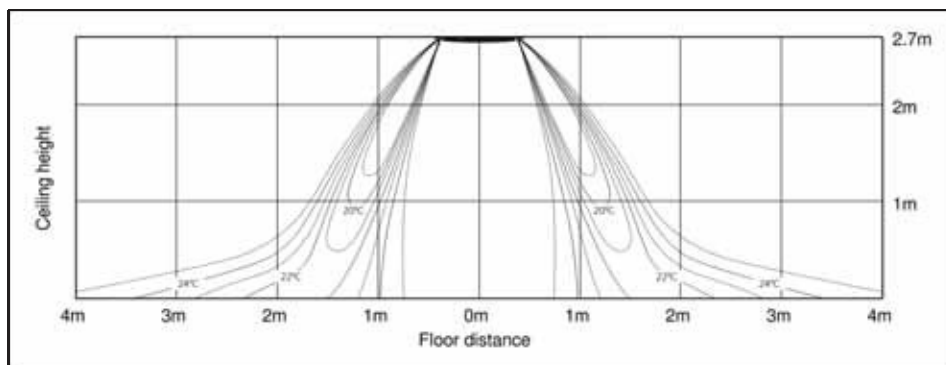


(3) Heating air velocity distribution

Discharge angle : 60°

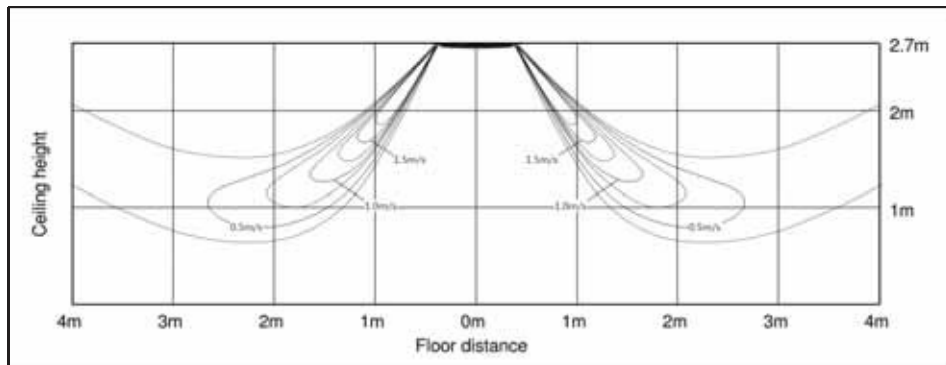

(4) Heating temperature distribution

Discharge angle : 60°

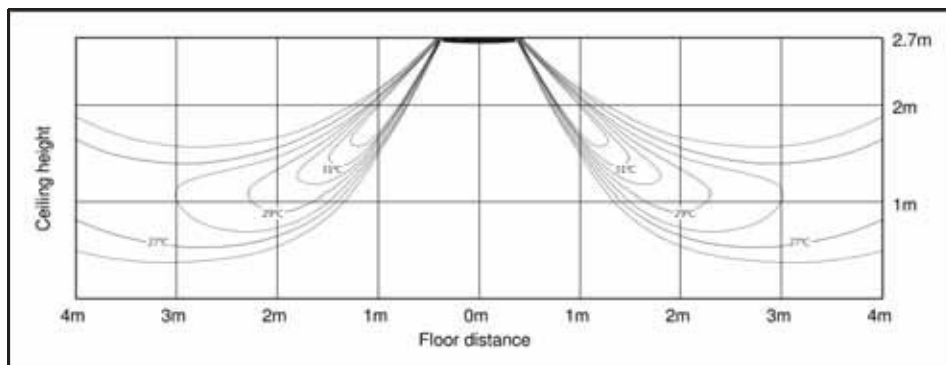


7 Temperature and air flow distribution

360 Cassette

AM071KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

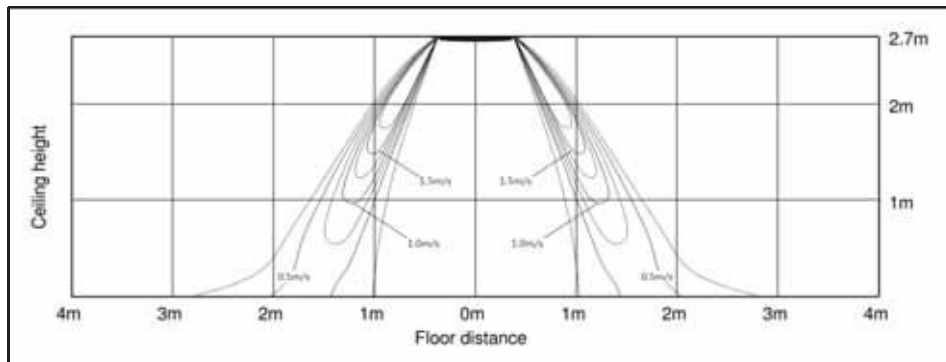


(2) Cooling temperature distribution

Discharge angle : 60°

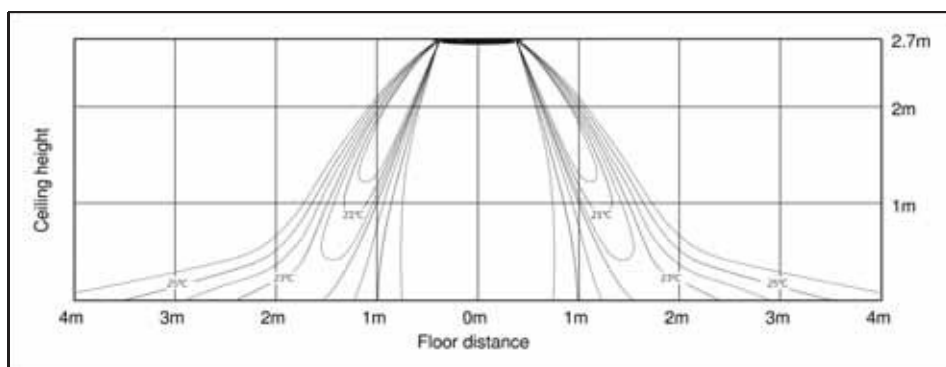


(3) Heating air velocity distribution

Discharge angle : 60°

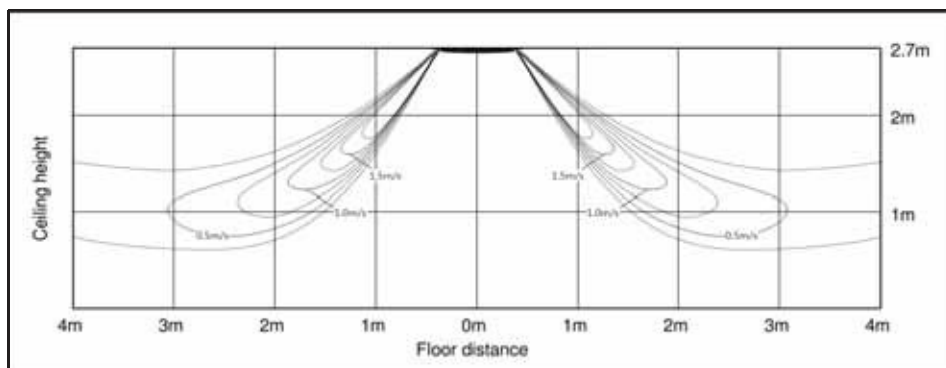

(4) Heating temperature distribution

Discharge angle : 60°

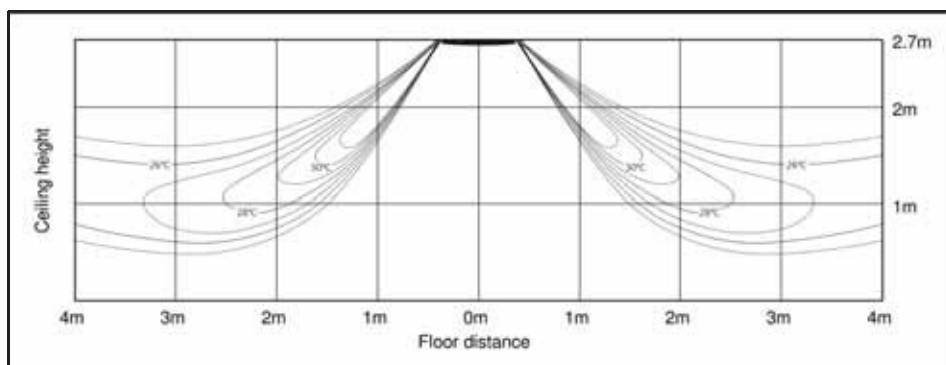


7 Temperature and air flow distribution

360 Cassette

AM090KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

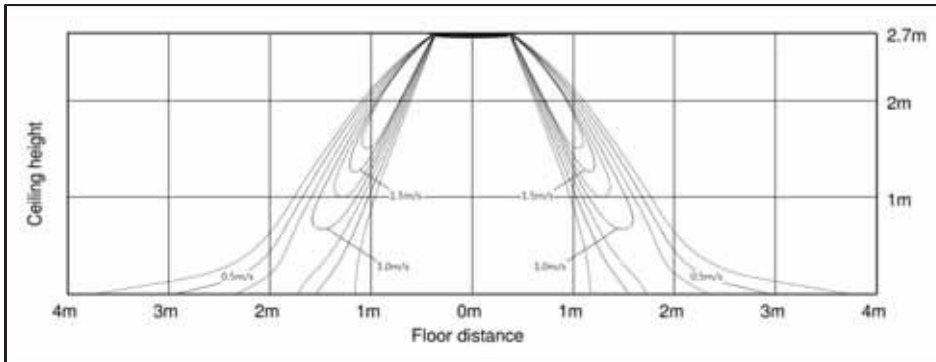


(2) Cooling temperature distribution

Discharge angle : 60°

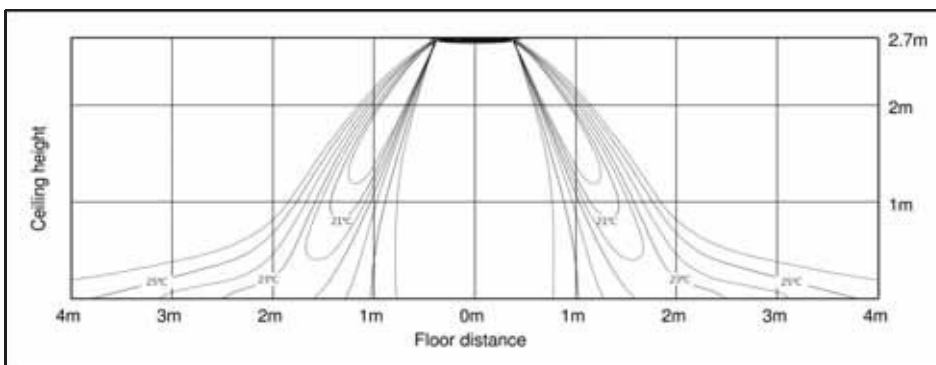


(3) Heating air velocity distribution

Discharge angle : 60°

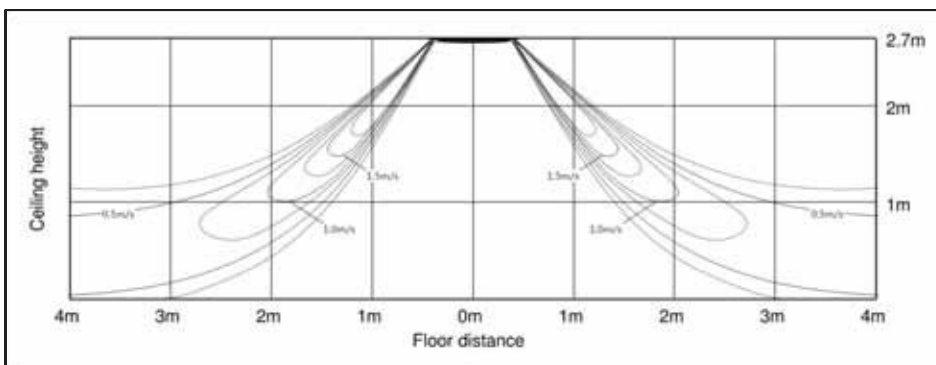

(4) Heating temperature distribution

Discharge angle : 60°

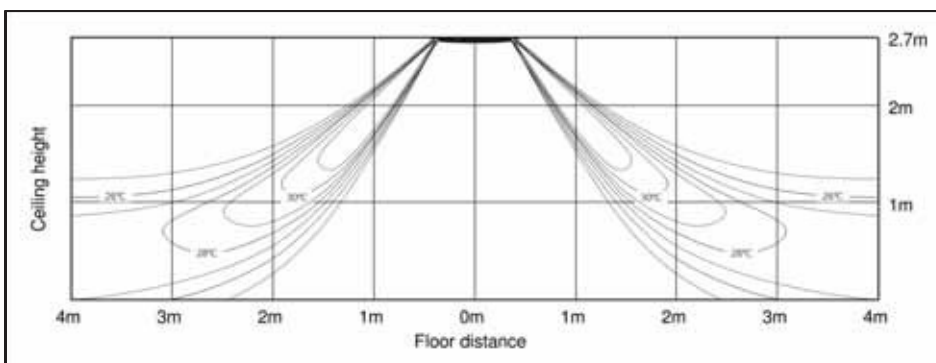


7 Temperature and air flow distribution

360 Cassette

AM112KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

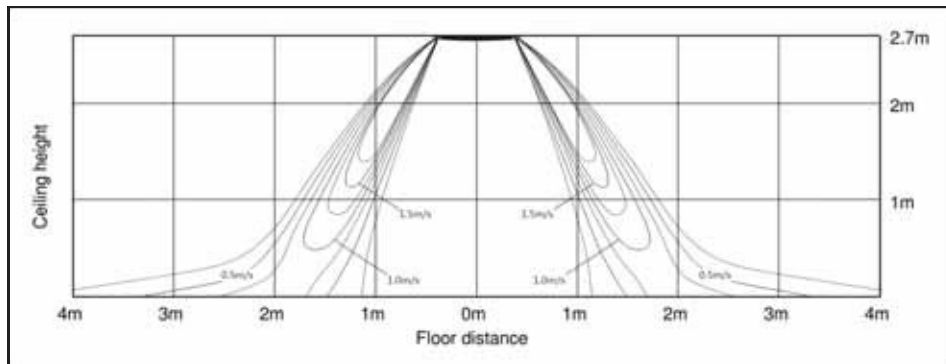


(2) Cooling temperature distribution

Discharge angle : 60°

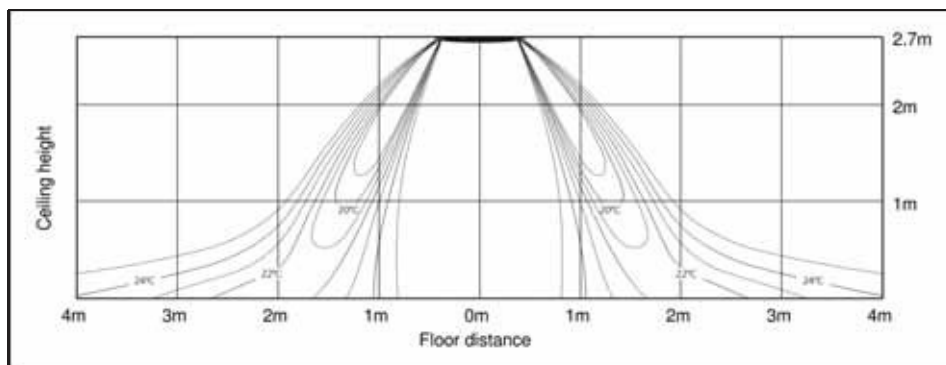


(3) Heating air velocity distribution

Discharge angle : 60°

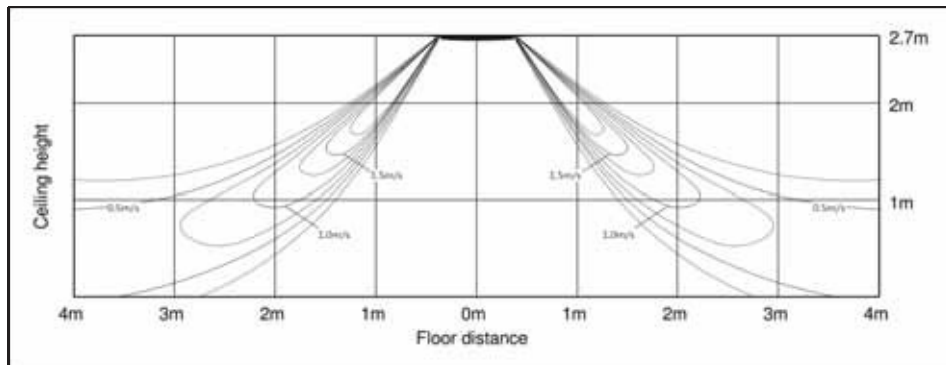

(4) Heating temperature distribution

Discharge angle : 60°

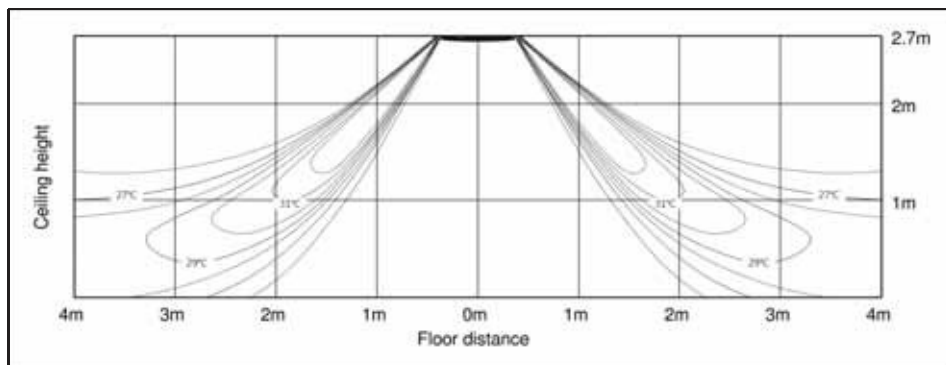


7 Temperature and air flow distribution

360 Cassette

AM128KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

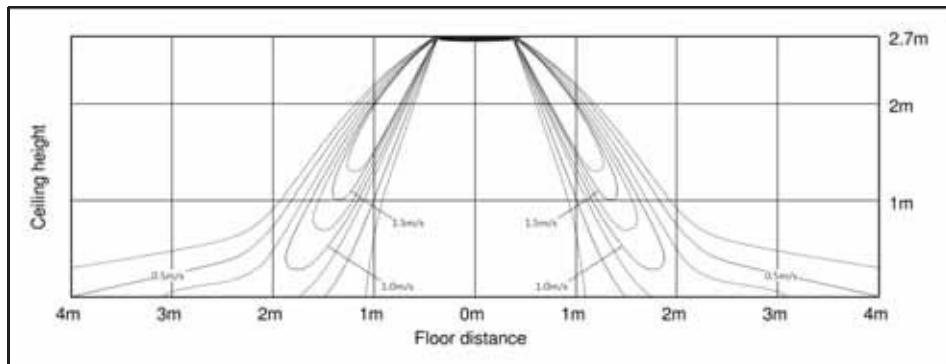


(2) Cooling temperature distribution

Discharge angle : 60°

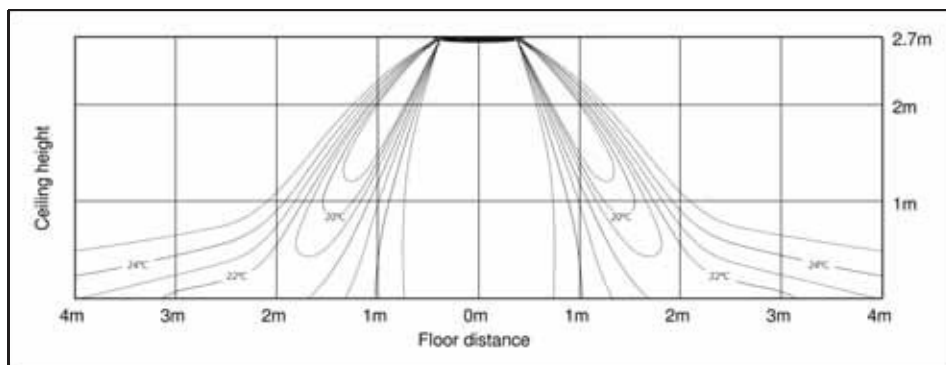


(3) Heating air velocity distribution

Discharge angle : 60°

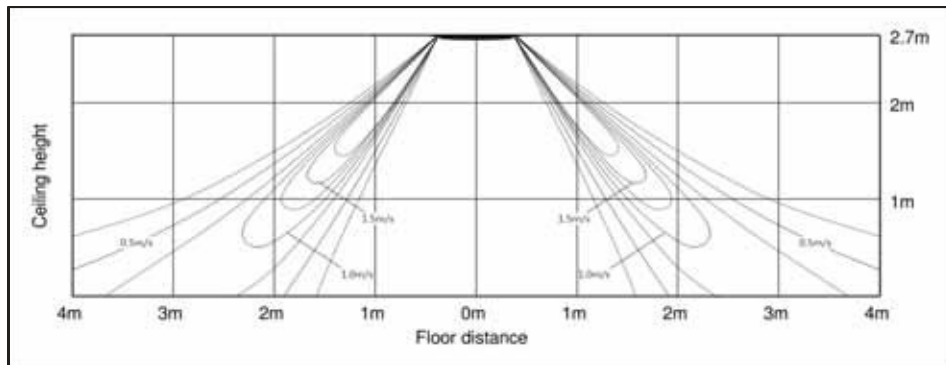

(4) Heating temperature distribution

Discharge angle : 60°

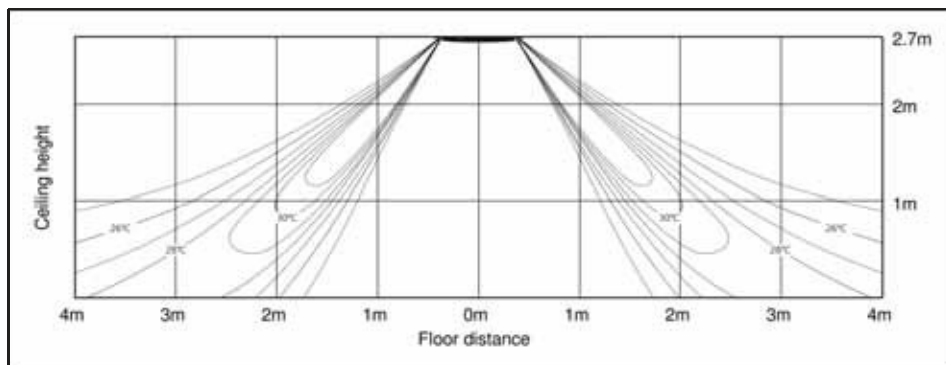


7 Temperature and air flow distribution

360 Cassette

AM140KN4DEH/EU


(1) Cooling air velocity distribution

Discharge angle : 60°

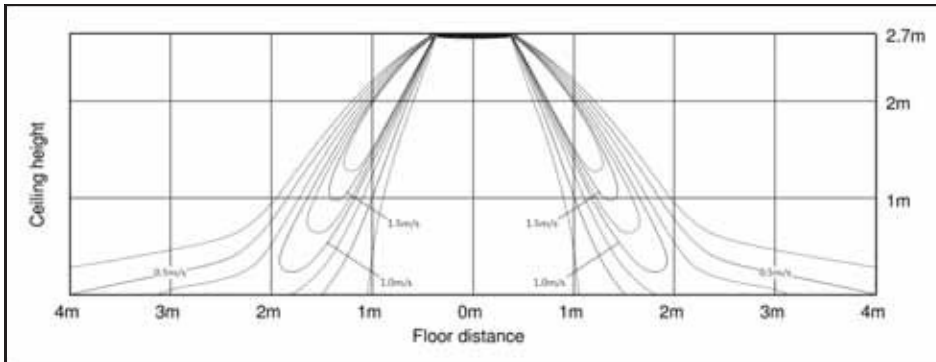


(2) Cooling temperature distribution

Discharge angle : 60°

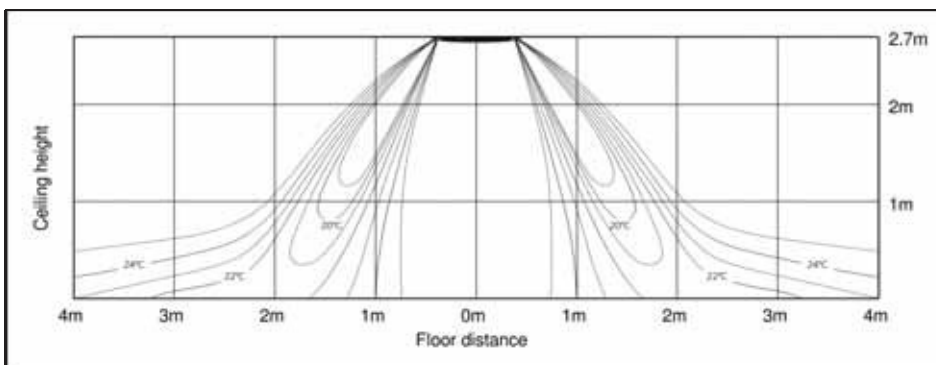

(3) Heating air velocity distribution

Discharge angle : 60°

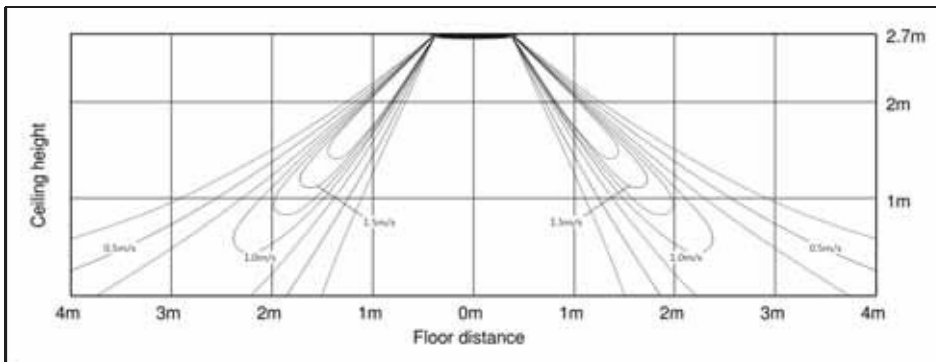

(4) Heating temperature distribution

Discharge angle : 60°

